

## SHORT HANDLE ILLUMINATED SELECTOR SWITCH

Short Lever Handle

L21ME30

Selector Handle Illuminated 3 Pos Stable 45° Black

- IP66 / IP69K
- 2 or 3 position
- Illuminate with LED blocks
- Red, green or black lever with translucent surround



### PRODUCT DESCRIPTION

Illuminated selector switch head with a short lever handle that mount in a 22.5mm hole with protection rating IP66 / IP69K. Combine with clip, contact blocks and LED module (must be in centre position) to make complete illuminated selector switch assembly.

The central part of the switch head, side and tip of the lever are translucent and illuminate according to the colour of LED block used. The lever of the switch is solid in colour and available in red, green & black.

Available in 2 or 3 position, latching or spring return in various switching angles.



Supplied with a matt chrome bezel as standard.

For black plastic bezel change the part number from L21xxxx to L22xxxx.

### TECHNICAL DATA

|   |                              |
|---|------------------------------|
| Angle                                     | 45°                          |
| Approvals                                 | UL 508, CSA 22.2, BV, CB, CE |
| Climatic resistance - constant humid heat | IEC 60068-2-3                |
| Climatic resistance - cyclic damp heat    | IEC 60068-2-30               |
| Climatic resistance - sea air             | IEC 60068-2-52               |
| Colour                                    | Black                        |
| Function                                  | Stable                       |
| Illuminated                               | Yes                          |
| Impact resistance                         | IK05                         |
| IP class                                  | IP66, IP69, IP69K            |
| Mechanical life expectancy                | 300 000 cycles               |
| Positions                                 | 3                            |

|                               |                       |
|-------------------------------|-----------------------|
| Protection class              | II (double insulated) |
| Recommended tightening torque | 3                     |
| Storage temperature max       | 70 °C                 |
| Storage temperature min       | -40 °C                |
| Temperature operational max   | 70 °C                 |
| Temperature operational min   | -25 °C                |
| Type                          | Short lever           |
| Weight                        | 17.8 g                |

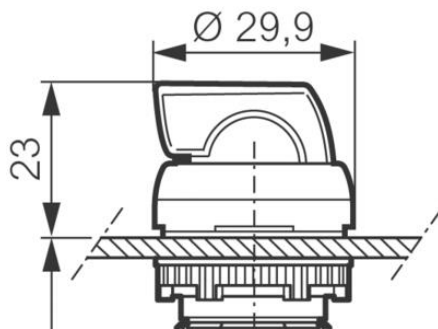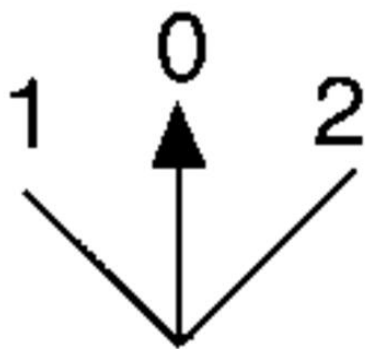

#### Kontakternas funktion till belysta vred med 3 positioner

Vredets position sett framifrån panelen.  
 Kontaktblockens aktivitet sett framifrån panelen.  
 LED blocket är fritt att påverkas eller ej av kontakternas funktion.

