OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

PUSHBUTTON ENCLOSURES

LBX0100J
Box Empty Black Base Yellow Lid 1 Hole



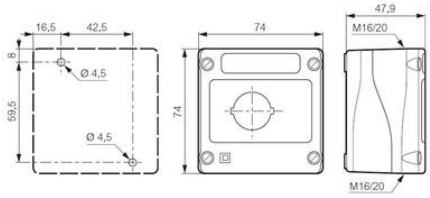
- 1, 2, 3, 4 and 5 hole pushbutton enclosures
- Pushbutton enclosure contact blocks

PRODUCT DESCRIPTION

TECHNICAL DATA

Enclosure colour	Yellow, Black

IP class	IP66
Impact resistance	IK07
Protection class	II
Cable entry	2xM16/M20
Temperature operational min	-25 °C
Temperature operational max	70 °C
Storage temperature min	-40 °C
Storage temperature max	70 °C
Approvals	UL 508, CSA 22.2, BV, CB, CE
Climatic resistance - cyclic damp heat	IEC 60068-2-30
Climatic resistance - sea air	IEC 60068-2-52
Climatic resistance - constant humid heat	IEC 60068-2-3


16,5
42,5
74
47,9
M16/20
8
59,5
Ø 4,5
Ø 4,5
74
M16/20