OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

LEGEND PLATES

Legend plate frames & inserts

LWP3
Legend Plate Holder Round (For LIA Inserts)



- Standard or large width frames
- 5 legend insert colour options
- Option for custom engraved texts
- Option for twin touch head


PRODUCT DESCRIPTION

Legend plate frames are mounted on the pushbutton head before installation in the panel and the inserts are simply snaped into the legend plate frame.
Inserts are available in red, black, white, transparent or standard silver.
LIAx are standard width inserts for 2 lines of up to 13 characters.
LIBx are large width inserts for 2 lines of up to 18 characters.
LWP3 is the standard frame for LIAx inserts.
LWG3 is the standard frame for LIBx inserts.
LWP4 is a square profile frame for LIAx inserts
LWP2 is for twin & tripple touch heads for LIAx inserts.

All options below are for blank legend plate inserts but we can offer a wide range of pre engraved inserts of standard texts or symbols. We can also custom engrave the inserts to your exact requirement, please contact us for more details.

TECHNICAL DATA

Temperature operational min	-25 °C
Temperature operational max	70 °C
Storage temperature min	-40 °C
Storage temperature max	70 °C
Approvals	UL 508, CSA 22.2, BV, CB, CE
Climatic resistance - cyclic damp heat	IEC 60068-2-30
Climatic resistance - sea air	IEC 60068-2-52
Climatic resistance - constant humid heat	IEC 60068-2-3

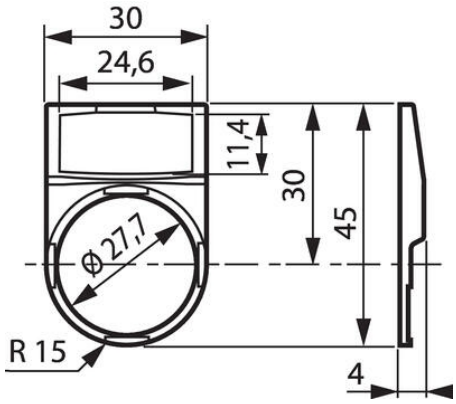

Standardtext

Text	Kod	Text	Kod	Text	Kod	Text	Kod
Alarm	321	Hand - 0 - Auto	591	Power On	330	Start	301
Auto	313	Hand - Auto	593	Raise	307	Stop	302
Close	314	Jog	328	Reset	315	Tripped	3327
Down	336	Lower	308	Reverse	306	Up	335
Fast	310	Off	304	Run	327	0 - I	081
Forward	305	On	303	Running	3326	0 - I - Start	093
Hand	324	Open	313	Slow	309	I - 0 - II	091

Standardsymboler ISO/DIN

Beskrivning	Symbol	Kod	Beskrivning	Symbol	Kod	Beskrivning	Symbol	Kod
Rak fortlöpande rörelse ISO 1		A01	Högsta, lokal ISO 6149		A69	Stopp ISO 7earth 10N 46		A14
Allemenstid vak rörelse ISO 0		A05	Högsta, lokal ISO 6160		A68	Skjuva ISO 112 DIN 45		A15
Roterande fortlöpande rörelse medsols ISO 1N,DIN 100		A07	Bromsa ISO 45		A60	Varning, plågående kraft ISO 80 DIN 45		A62
Roterande fortlöpande rörelse motsols ISO 70		B07	Högsta bromsa ISO 68		A66	Huvudbrytare ISO 84		A64
Vriantid ISO 10		A15	Automatisk cykel (eller semiautomatisk) ISO 67		A67	Ämnesmanöverplats ISO 101		C01
Värdeinlesning ISO 05		A06	Manuell kontroll ISO 68		A68	Belysning ISO 102 DIN 150		C02
Värdeminskning ISO 09		A05	n=0%n= Stoka stromkrets ISO 66		A69	Rundmarkering ISO 103 DIN 715		C01
Justerbar ISO 62		A62	n=0%n= Öppna stromkrets ISO 70		A70	Bilia ISO 109 DIN 264		C08
Klämma ihop, pressa ISO 62A		A63	ON/OFF stoka = öppna stromkrets ISO 71		A71	Bygg ISO 109 DIN 264		C06
Klämma ihop, pressa ISO 63B		B63	Bistå strömkrets, manuell impuls ISO 72 DIN 150		A72	Ljudlå Alarm DIN 110		C01

Tillägg standardsymboler

001	002	P01	062	002	P02	003	004	005
						II	III	IV

Standardtext

Text	Kod	Text	Kod	Text	Kod	Text	Kod
Alarm	321	Hand - 0 - Auto	591	Power On	330	Start	301
Auto	313	Hand - Auto	593	Raise	307	Stop	302
Close	314	Jog	328	Reset	315	Tripped	3327
Down	336	Lower	308	Reverse	306	Up	335
Fast	310	Off	304	Run	327	0 - I	081
Forward	305	On	303	Running	3326	0 - I - Start	093
Hand	324	Open	313	Slow	309	I - 0 - II	091

Standardsymboler ISO/DIN

Tillägg standardsymboler