OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

LEGEND PLATES

Legend plate frames & inserts

LWP2
Legend Plate Holder Twintouch (For LIA Inserts)



- Standard or large width frames
- 5 legend insert colour options
- Option for custom engraved texts
- Option for twin touch head


PRODUCT DESCRIPTION

Legend plate frames are mounted on the pushbutton head before installation in the panel and the inserts are simply snaped into the legend plate frame.
Inserts are available in red, black, white, transparent or standard silver.
LIAx are standard width inserts for 2 lines of up to 13 characters.
LIBx are large width inserts for 2 lines of up to 18 characters.
LWP3 is the standard frame for LIAx inserts.
LWG3 is the standard frame for LIBx inserts.
LWP4 is a square profile frame for LIAx inserts
LWP2 is for twin & tripple touch heads for LIAx inserts.

All options below are for blank legend plate inserts but we can offer a wide range of pre engraved inserts of standard texts or symbols. We can also custom engrave the inserts to your exact requirement, please contact us for more details.

TECHNICAL DATA

Approvals	UL 508, CSA 22.2, BV, CB, CE
Climatic resistance - constant humid heat	IEC 60068-2-3
Climatic resistance - cyclic damp heat	IEC 60068-2-30
Climatic resistance - sea air	IEC 60068-2-52
Storage temperature max	70 °C
Storage temperature min	-40 °C
Temperature operational max	70 °C
Temperature operational min	-25 °C

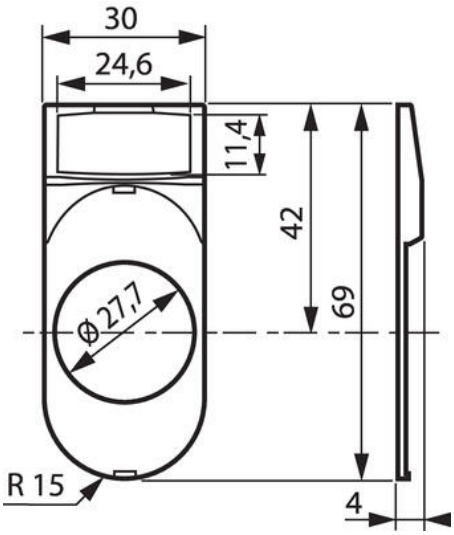

Standardtext

Text	Kod	Text	Kod	Text	Kod	Text	Kod
Alarm	321	Hand - 0 - Auto	591	Power On	330	Start	301
Auto	313	Hand - Auto	593	Raise	307	Stop	302
Close	314	Jog	328	Reset	315	Tripped	3327
Down	336	Lower	308	Reverse	306	Up	335
Fast	310	Off	304	Run	327	0 - I	081
Forward	305	On	303	Running	3326	0 - I - Start	093
Hand	324	Open	313	Slow	309	I - 0 - II	091

Standardsymboler ISO/DIN

Beskrivning	Symbol	Kod	Beskrivning	Symbol	Kod	Beskrivning	Symbol	Kod
Rak fortlöpande rörelse ISO 1		A01	Frigång, hiss (ISO 8462)		A64	Stopp (ISO 7000 DIN 46)		A72
Alternerande rak rörelse ISO 2		A05	Frigång, hiss (ISO 8462)		A64	Stoppur (ISO 7000 DIN 46)		A70
Roterande fortlöpande rörelse medsols ISO 7000 DIN 130		A07	Bromsa (ISO 68)		A65	Varning, plågående kraft (ISO 3864 DIN 4)		A62
Roterande fortlöpande rörelse motsols ISO 70		B07	Frigång bromsa (ISO 68)		A66	Huvudbrytare ISO 84		A64
Vrantal ISO 10		A15	Automatisk cykel (som semiautomatisk) ISO 67		A67	Ämnestransportör (ISO 157		C01
Växelverkan ISO 05		A26	Manuell kontroll (ISO 68		A68	Belysning (ISO 7027 DIN 108		C02
Växelverkan ISO 09		A25	c=CN<< Sluta stroklekes (ISO 68		A69	Kvantimätning (ISO 7010 DIN 715		C07
Justerbar ISO 157		A62	c=STOP<< Öppna strömkrets (ISO 70		A70	Bilia (ISO 7000 DIN 264		C08
Klämma mop, pressa ISO 6124		A63	ON/OFF sluta = öppna strömkrets (ISO 7		A71	Bulg (ISO 7000 DIN 264		C09
Klämma mop, pressa ISO 6336		B63	Bilsa strömkrets, manuell impuls (ISO 70 DIN 108		A72	Ljuds Alarm DIN 730		C01

Tillägg standardsymboler

001	002	P01	002	002	P02	003	004	005
						II	III	IV

Standardtext

Text	Kod	Text	Kod	Text	Kod	Text	Kod
Alarm	321	Hand - 0 - Auto	591	Power On	330	Start	301
Auto	313	Hand - Auto	593	Raise	307	Stop	302
Close	314	Jog	328	Reset	315	Tripped	3327
Down	336	Lower	308	Reverse	306	Up	335
Fast	310	Off	304	Run	327	0 - I	081
Forward	305	On	303	Running	3326	0 - I - Start	093
Hand	324	Open	313	Slow	309	I - 0 - II	091

Standardsymboler ISO/DIN

Tillägg standardsymboler