OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

PILOT LIGHT HEADS

Combine with separate clip & LED block

L20SE40
Pilotlight Head Yellow



- IP66 / IP69K
- 5 colour options
- Low profile modern design
- Optional text or symbol

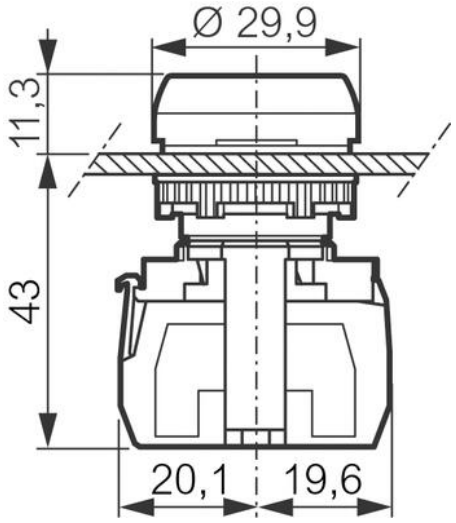
PRODUCT DESCRIPTION

Pilot light heads that mount in a 22.5mm hole with IP66 / IP69K protection rating.
Combine with a separate clip & LED module from the standard range to make complete pilot light.
Clips & contacts available separately or as combined units.
Option to have head with text or symbol please enquire for details.

TECHNICAL DATA

Colour	Yellow

IP class	IP66, IP69, IP69K
Impact resistance	IK05
Temperature operational min	-25 °C
Temperature operational max	70 °C
Storage temperature min	-40 °C
Storage temperature max	70 °C
Approvals	UL 508, CSA 22.2, BV, CB, CE
Recommended tightening torque	3
Climatic resistance - cyclic damp heat	IEC 60068-2-30
Climatic resistance - sea air	IEC 60068-2-52
Climatic resistance - constant humid heat	IEC 60068-2-3


Ø 29,9
11,3
43
20,1
19,6