


STEGO CONNECT

SCE, SCM, SEN

07300.0-00

SEN 073, Stego Connect, Temperature and Humidity sensor, -40 ...+70°C, 0-100% RH, IP64, M12

- Intelligent Condition Monitoring
- Temperature, Humidity, Pressure, Luminosity and Distance Sensors
- Compatible with Smart Sensor CSS 014
- IO-Link hubs
- Cloud based

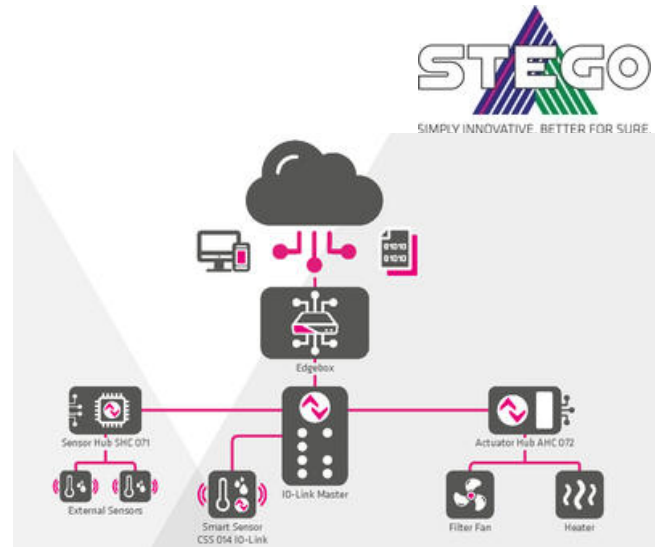

PRODUCT DESCRIPTION

From thermal management to intelligent condition monitoring!

STEGO CONNECT allows the integration of analogue devices, for example heaters, filter fans, etc. into the digital world.

The system contains analogue and/or digital sensors for the collection and transfer of environmental data (Remote Monitoring) and the data is then used to control analogue devices to control the environment within an application. All this is done with the sensor and actuator hubs

The data is transmitted via IO-Link from the sensors to the cloud via the hubs and IO-Link Master. The data in the cloud (Big Data) serves as basis for the optimization of the overall application conditions and provides a dashboard for visual indication off the system.

TECHNICAL DATA

Approvals	CE, UKCA
Humidity storage	< 90 % rF
Mounting	Independent
Operating humidity	< 100 % rF
Operational temperature	-40 to +70 °C
Storage temperature	-40 °C to 85 °C
Weight	0.025 kg

