
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

COMPACT DISTRIBUTION BLOCKS

RPU, RPT

RPT3000
3 Pole Compact Distribution Block - RPT 125

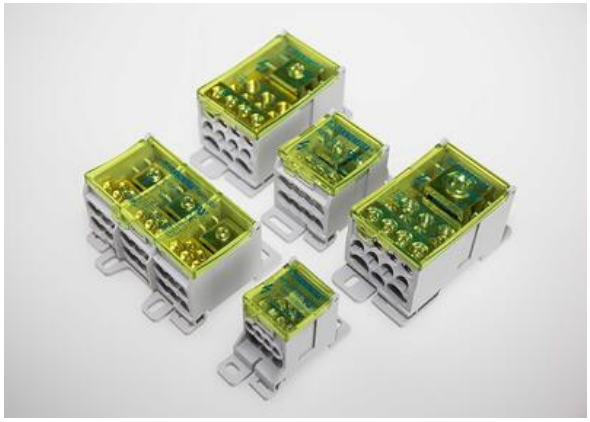

- Separate inputs
- Easy wiring
- Galvanised steel screws included
- Quick hook up on DIN rails
- UL Listed 302208

PRODUCT DESCRIPTION

Teknomega offer a variety of distribution blocks which are used in terminal board distribution units. These include single blocks and compact blocks permitting the units to range from 40 A up to 400 A.
With various applications the blocks are used in switchboards, automation and command panel boards and distribution panel boards.

Compact distribution blocks

Ranging from 80 A to 400 A and 1 and 3 pole the blocks suit applications where the effective short-circuit current value (Icc eff) is higher than 10 kA.

Each block reaches UL approval standards.

TECHNICAL DATA

GENERAL DATA

IP class	IP20
Nominal insulation voltage	600 V
Short-circuit current resistance IPK (peak value)	30 kA
Short-circuit current resistance ICW over 1s	4.4 kA

CONNECTION DATA

Connections	7
Number of inputs A	1
Input A: wire cross-section stranded, min.	10 mm²
Input A: wire cross-section stranded, max.	35 mm²
Input A: wire cross-section with wire-end ferrules, min.	10 mm²

Input A: wire cross-section with wire-end ferrules, max.	35 mm²
Number of outputs A	6
Output A: wire cross-section stranded, min.	2.5 mm²
Output A: wire cross-section stranded, max.	16 mm²
Output A: wire cross-section stranded with wire-end ferrules, min.	2.5 mm²
Output A: wire cross-section stranded with wire-end ferrules, max.	16 mm²
Screw type	Galvanized steel screws


DIMENSIONS


Length (B)	85 mm
Height (A)	75 mm
Width (C)	48 mm


ADDITIONAL DATA

Pack size	1




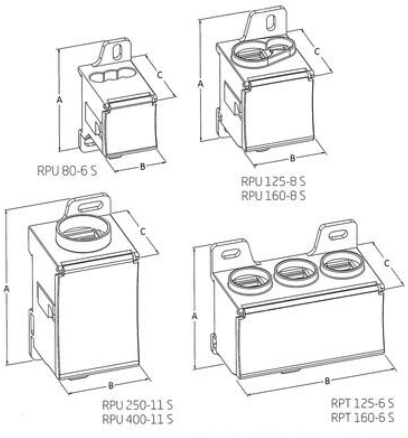









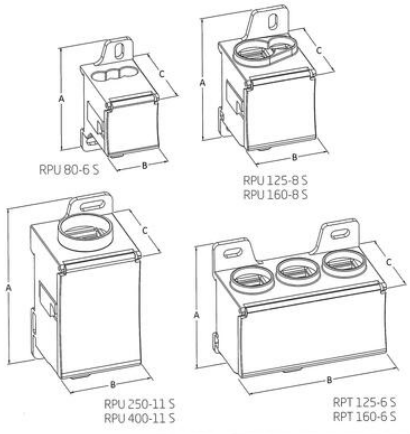


A
C
B


A
C
B