


## COMPACT DISTRIBUTION BLOCKS

RPU, RPT

RPU3010

Unipolar Distribution Block - RPU 250-11

- Separate inputs
- Easy wiring
- Galvanised steel screws included
- Quick hook up on DIN rails
- UL Listed 302208

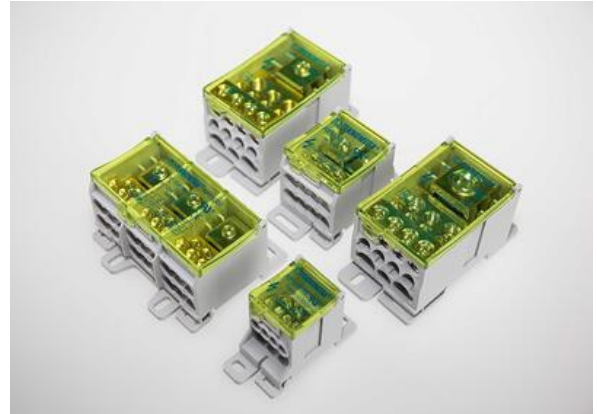

### PRODUCT DESCRIPTION

Teknomega offer a variety of distribution blocks which are used in terminal board distribution units. These include single blocks and compact blocks permitting the units to range from 40 A up to 400 A.

With various applications the blocks are used in switchboards, automation and command panel boards and distribution panel boards.

Compact distribution blocks

Ranging from 80 A to 400 A and 1 and 3 pole the blocks suit applications where the effective short-circuit current value ( $I_{cc\ eff}$ ) is higher than 10 kA.

Each block reaches UL approval standards.

## TECHNICAL DATA

### GENERAL DATA

IP class	IP20
Nominal insulation voltage	600 V
Short-circuit current resistance IPK (peak value)	51 kA
Short-circuit current resistance ICW over 1s	21 kA

### CONNECTION DATA

Connections	12
Number of inputs A	1
Input A: wire cross-section stranded, min.	35 mm <sup>2</sup>
Input A: wire cross-section stranded, max.	120 mm <sup>2</sup>
Input A: wire cross-section with wire-end ferrules, min.	35 mm <sup>2</sup>

<b>Input A: wire cross-section with wire-end ferrules, max.</b>	95 mm <sup>2</sup>
<b>Number of outputs A</b>	2
<b>Output A: wire cross-section stranded, min.</b>	6 mm <sup>2</sup>
<b>Output A: wire cross-section stranded, max.</b>	35 mm <sup>2</sup>
<b>Output A: wire cross-section stranded with wire-end ferrules, min.</b>	6 mm <sup>2</sup>
<b>Output A: wire cross-section stranded with wire-end ferrules, max.</b>	25 mm <sup>2</sup>
<b>Number of outputs B</b>	5
<b>Output B: wire cross-section stranded, min.</b>	2.5 mm <sup>2</sup>
<b>3139_Output B: wire cross-section stranded, max. (mm<sup>2</sup>)</b>	16
<b>Output B: wire cross-section stranded with wire-end ferrules, min.</b>	2.5 mm <sup>2</sup>
<b>Output B: wire cross-section stranded with wire-end ferrules, max.</b>	16 mm <sup>2</sup>
<b>Number of outputs C</b>	4
<b>Output C: wire cross-section stranded, min.</b>	2.5 mm <sup>2</sup>
<b>Output C: wire cross-section stranded, max.</b>	10 mm <sup>2</sup>
<b>Output C: wire cross-section stranded with wire-end ferrules, min.</b>	2.5 mm <sup>2</sup>
<b>Output C: wire cross-section stranded with wire-end ferrules, max.</b>	10 mm <sup>2</sup>
<b>Screw type</b>	Galvanized steel screws

## DIMENSIONS

<b>Length (B)</b>	47 mm
<b>Height (A)</b>	96 mm
<b>Width (C)</b>	50 mm

## ADDITIONAL DATA

<b>Pack size</b>	1
------------------	---

