


COMPACT DISTRIBUTION BLOCKS

RPU, RPT

RPU3015

Unipolar Distribution block 400 A - RPU 400-11

- Separate inputs
- Easy wiring
- Galvanised steel screws included
- Quick hook up on DIN rails
- UL Listed 302208

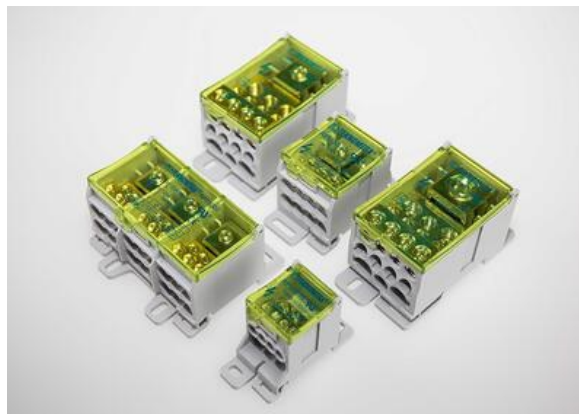

PRODUCT DESCRIPTION

Teknomega offer a variety of distribution blocks which are used in terminal board distribution units. These include single blocks and compact blocks permitting the units to range from 40 A up to 400 A.

With various applications the blocks are used in switchboards, automation and command panel boards and distribution panel boards.

Compact distribution blocks

Ranging from 80 A to 400 A and 1 and 3 pole the blocks suit applications where the effective short-circuit current value ($I_{cc\ eff}$) is higher than 10 kA.

Each block reaches UL approval standards.

TECHNICAL DATA

GENERAL DATA

IP class	IP20
Nominal insulation voltage	600 V
Short-circuit current resistance IPK (peak value)	51 kA
Short-circuit current resistance ICW over 1s	21 kA

CONNECTION DATA

Connections	12
Number of inputs A	1
Input A: wire cross-section stranded, min.	95 mm ²
Input A: wire cross-section stranded, max.	185 mm ²
Input A: wire cross-section with wire-end ferrules, min.	95 mm ²

Input A: wire cross-section with wire-end ferrules, max.	120 mm ²
Number of outputs A	2
Output A: wire cross-section stranded, min.	6 mm ²
Output A: wire cross-section stranded, max.	35 mm ²
Output A: wire cross-section stranded with wire-end ferrules, min.	6 mm ²
Output A: wire cross-section stranded with wire-end ferrules, max.	25 mm ²
Number of outputs B	5
Output B: wire cross-section stranded, min.	2.5 mm ²
3139_Output B: wire cross-section stranded, max. (mm ²)	16
Output B: wire cross-section stranded with wire-end ferrules, min.	2.5 mm ²
Output B: wire cross-section stranded with wire-end ferrules, max.	16 mm ²
Number of outputs C	4
Output C: wire cross-section stranded, min.	2.5 mm ²
Output C: wire cross-section stranded, max.	10 mm ²
Output C: wire cross-section stranded with wire-end ferrules, min.	2.5 mm ²
Output C: wire cross-section stranded with wire-end ferrules, max.	10 mm ²
Screw type	Galvanized steel screws

DIMENSIONS

Length (B)	47 mm
Height (A)	96 mm
Width (C)	50 mm

ADDITIONAL DATA

Pack size	1
-----------	---

