OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

AUTOVIMATION CHAMELEON ENCLOSURES

20.105.075
Chameleon L75, (Iris GTR)



- For cameras with a sideways viewing direction
- Maximum camera height 0 - 73mm (incl. lens)
- Made of aluminium or stainless steel
- Wide selection of accessories available

PRODUCT DESCRIPTION

Enclosure Configurator


The housing series offers protection for cameras with a sideways viewing direction. The Chameleon S series is available with or without lens tube. This allows the use of cameras with compact C-mount lenses. Inbuilt LEDs can usually be used if the distance to the front window is not too large. The same counts for the Chameleon L, that adjusts to lens and camera height with help of 4 different heights and the use of a lens tube if necessary. Typical cameras used with the Chameleon L are the Cognex Insight 5000 or the Sick Inspector. autoVimation now also offers a version made of surgical stainless steel for increases hygiene and corrosion resistance.

autoVimation offers a wide selection of enclosures to suit even the most specific requirements. To find a suitable enclosure please see the Enclosure Configurator (link above) or contact OEM Finland sales team for additional info!


TECHNICAL DATA

Height	90 mm
Housing material	Powder coated marine aluminum
Inner length	204 mm
IP class	IP67
Length	220 mm
Max camera height	73 mm
Max camera width	111 mm
Max lens diameter	76 mm
Weight	1800 g
Width	120 mm
Window seal	EPDM


Chameleon L Drawings

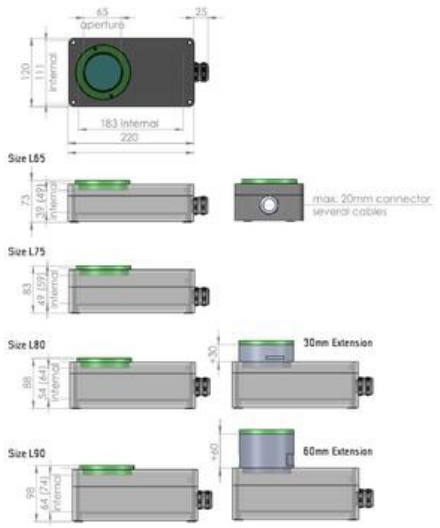

Chameleon S Drawings

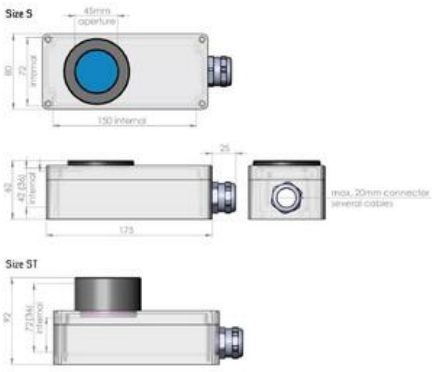

Chameleon L Drawings

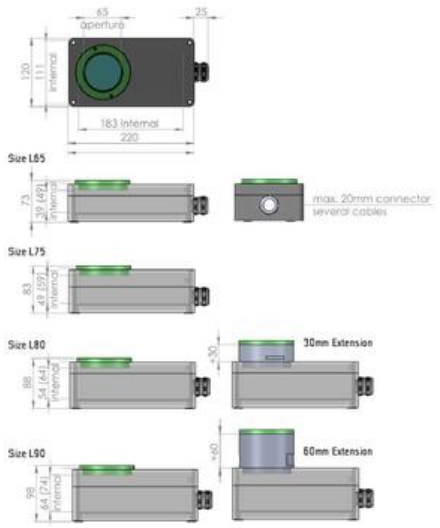

Chameleon S Drawings

