


## SCREW ON SHIELD CLIPS SSAB

### SSAB

3694.0

SSAB 5, Screw down shield clip, 2 - 5mm $\varnothing$  cables,  
Busbar mount

- Screw on clip for simple fitting
- Knurled thumbscrew, no tools required
- Large shield contact area

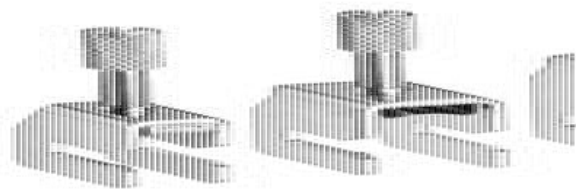

### PRODUCT DESCRIPTION

The SSAB can be mounted on a busbar. After wiring the terminal block, the shield-connection clip is mounted by simply swivelling in and tightening the knurled thumb screw.

This makes the SSAB screw-shield-connection clip very convenient and quick to wire. Depending on the length of the terminal blocks, two or more SH/SAB busbar supports can be used. These mechanically connect the front busbar with the DIN rail (support).

The SH1 busbar supports are used where a shield-connection system requires not to be mounted directly onto a panel rather than a DIN rail.

The 10 x 3 busbars can be easily and quickly snapped on to these supports. In both cases, the contact with the earth or ground potential can be established with a ZB clamping yoke.

## TECHNICAL DATA

### GENERAL DATA

Cable diameter min	2 mm
Cable diameter max	5 mm
Mounting	Busbar
Colour	Natural

### DIMENSIONS

Height	46.8 mm
Length	19.5 mm
Width	9 mm

### ADDITIONAL DATA

<b>Tariff code</b>	85369010
<b>Country of origin</b>	CN
<b>Weight</b>	13.76 g
<b>Pack size</b>	10
<b>Material</b>	Steel