
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

COMPACT SHIELD CLIPS - SABK

SABK

27259.0
SABKD 1,5-3/SSCH/Z, 10 x 3 mm Busbar mount double clip with strain relief, 1.5 - 3mmø cables

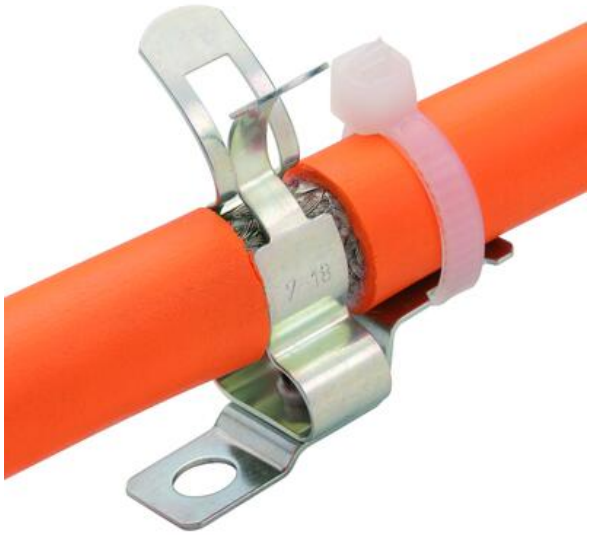

- Suitable for DIN rail, busbar & direct-mount installation
- Tool-free installation
- Available in various sizes of shield-connection brackets
- Excellent flexibility
- Reduction/optimisation of product types leads to reduced costs

PRODUCT DESCRIPTION

In the ever growing industry of process engineering and the use of sensitive equipment and PLC's, the need for a higher degree of interference protection is required for these systems.

To ensure the best possible EMC protection the cable shielding and grounding is of the upmost importance. The connection point of the cable screen and the clip is a critical point and is required to be a low Ohm resistance and minimum inductive resistance.

Conta-Clip offer one of the most comprehensive range of practical, simple and quick to mount shielding clip products on the market today

The SABK range is the latest from Conta-Clip and is the most flexible and offering a tool-free installation

When working with Conta-Clip holders for direct, DIN rail or busbar installations, no tools are required to mount the corresponding shield-connection bracket. The shield-connection brackets are available in various sizes with a clamping range from 1.5 to 18 mm. Only a small screwdriver is required for the disassembly.

The SABK system is modular, so you can build up whatever combination your require

Simply choose the required method of mounting

- MF/D M4/Z Direct Mount with strain relief, MF/D M4 Direct mount without strain relief
- MF-SABK/SSCH/Z Busbar with strain relief, MF-SABK/SSCH Busbar without strain relief
- MF-SABK/35/Z TS35 din rail with strain relief, MF-SABK/35 TS35 din rail without strain relief

Then the size of cable clip

- SABK 3 to SABK 16 - 5 Sizes from 3mm dia to16mm
- SABKM 12 - Multi-clip 3 - 12mm dia or SABKM 18 - Multi-clip 7 - 18mm

If you only use one configuration, then these can also be supplied fully assembled and ready to fit under one part number, keeping your inventory down to a minimum.

- SABKM/D - Direct mount with Multi-clip
- SABKM/SSCH, SABKD/SSCH - Busbar mount with SABK or Multi clip
- SABK/MF, SABKM/MF - TS35 rail mount with SABK or Multi clip

TECHNICAL DATA

GENERAL DATA

Cable diameter min	1.5 mm
Cable diameter max	3 mm
Mounting	Busbar
Contact surface	Galvanized

ADDITIONAL DATA

Tariff code	73201090
Country of origin	EEC
Weight	6.67 g
Pack size	10

Material	Spring steel 1.4310

