OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

C12 INTERFACE RELAY

2-pole 5 A - IRC

C12A22X110D
Relay 8 Pin 2 Pole 5µ Au LED 110V dc



- Robust flat pins
- Both mechanical and LED indication
- Colour-coded test button
- Integrated safety components

PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA


Working Un	0,8-1,10
Nominal power dc	0.7 W
Coil voltage dc	110 V DC
Voltage min	0.35 V
Overvoltage UNX max	1.1
Response time	10 ms


OUTPUT DATA


Number of contacts	2
Contact material	AgNi + 3 µ Au
Breaking Voltage	250 V
Breaking capacity current	5 A
Recommended max load	5 A/250 V AC 1; 0,5A/110 V DC-1
Recommended min load	5 mA/5 V
Mechanical life expectancy	AC: 10Mill/. DC: 20 Mill
Surge current (20 ms)	15 A
Bounce time	1
Release time	5 ms
Release time + contact debounce	8 ms

GENERAL DATA


IP class	IP40
Isolation contact/contact	3000 V
Isolation contact/coil	5000 V
Frequency	50 Hz
Optional coil	X (LED)
Weight	21 g

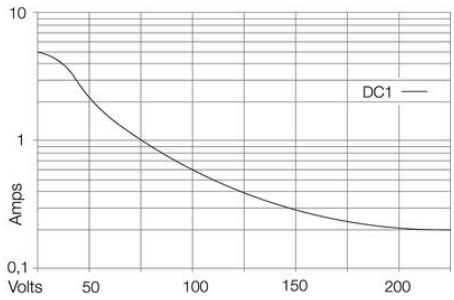






Gap:
0,5 mm





C12-A22X


02

5A 250V AC-1
5A 30V DC-1









Made in India