


## INTERFACE RELAY BASES ONLY

16194.2

IRCP 60 V AC/DC, Fused relay base

- Mount/dismount lever
- Pluggable external cross-connectors

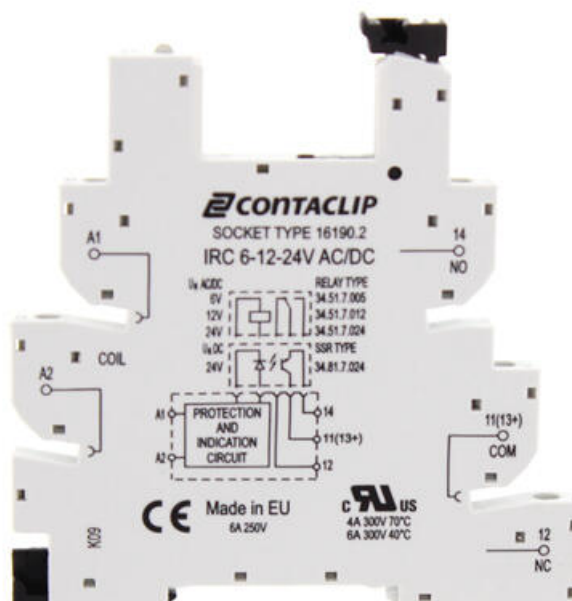

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### INPUT DATA

|                      |            |
|----------------------|------------|
| Rated voltage $U_n$  | 60 V ac/dc |
| Overvoltage category | III        |
| Contamination degree | 3          |
| LED status           | Yes        |
| Freewheeling diode   | No         |

#### OUTPUT DATA

|                                 |                |
|---------------------------------|----------------|
| Contact configuration           | 1 CO           |
| Rated V ac / switching V ac max | 250 / 400 V ac |

#### CONNECTION DATA

|                                |                     |
|--------------------------------|---------------------|
| Cross section single wire from | 0.2 mm <sup>2</sup> |
| Cross section single wire to   | 2.5 mm <sup>2</sup> |
| Stripping length               | 10 mm               |
| Torque                         | 0.5                 |
| Connection type                | Screw               |

GENERAL DATA

|                            |        |
|----------------------------|--------|
| Approvals                  | CE     |
| Fuse holder                | Yes    |
| IP class                   | IP20   |
| Operating temperature from | -40 °C |
| Operating temperature to   | 70 °C  |

DIMENSIONS & MATERIALS

|                              |         |
|------------------------------|---------|
| Width                        | 6.2 mm  |
| Length                       | 94.3 mm |
| Height TS 35 / 7.5 with base | 90.7 mm |
| Flammability class           | UL94-V2 |

ADDITIONAL DATA

|                   |          |
|-------------------|----------|
| Tariff code       | 85369010 |
| Country of origin | IT       |
| Weight            | 27 g     |
| Pack size         | 10       |