
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CONTACLIP

INTERFACE RELAY BASES ONLY

16200.2
IRCP LW 230...240 V AC, Fused relay base

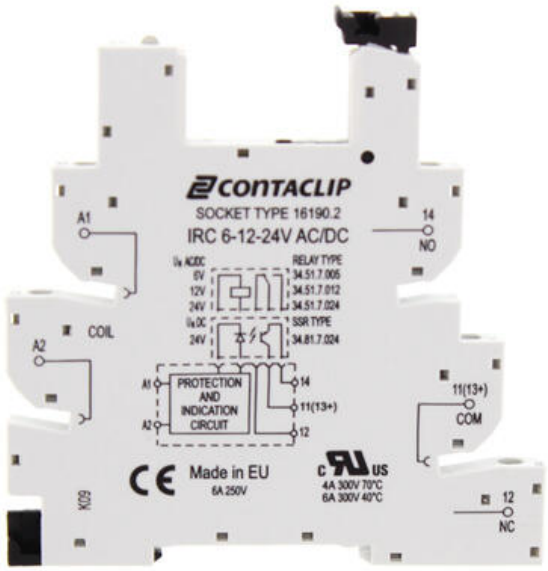

- Mount/dismount lever
- Pluggable external cross-connectors

PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Rated voltage Un	230-240 V ac
Overvoltage category	III
Contamination degree	3
LED status	Yes

OUTPUT DATA

Contact configuration	1 CO
Rated V ac / switching V ac max	250 / 400 V ac
AC residual current suppression	Yes

CONNECTION DATA

Cross section single wire from	0.2 mm²
Cross section single wire to	2.5 mm²
Stripping length	10 mm
Torque	0.5
Connection type	Screw

GENERAL DATA

Approvals	CE
Fuse holder	Yes
IP class	IP20
Operating temperature from	-40 °C
Operating temperature to	70 °C

DIMENSIONS & MATERIALS

Width	6.2 mm
Length	94.3 mm
Height TS 35 / 7.5 with base	90.7 mm
Flammability class	UL94-V2

ADDITIONAL DATA

Tariff code	85369010
Country of origin	IT
Weight	27 g
Pack size	10