
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# MFR TIMED INTERFACE RELAY WITH FUSED BASE

MFR

16207.2
MFR IRCP 12...24V AC/DC, Timer relay base

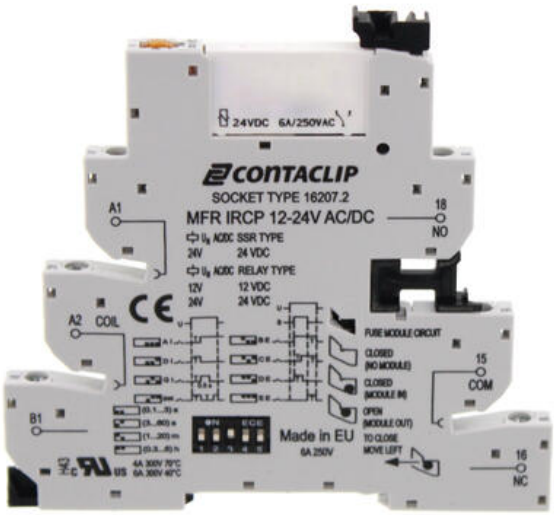


- Multifunction timing relay
- 12V or 24V control
- Screw or push-in base

**PRODUCT DESCRIPTION**

# TECHNICAL DATA

## INPUT DATA

| | |
|---|---|
| **Power ac/dc** | 12 - 24 V |
| **Overvoltage category** | III |
| **Contamination degree** | 3 |
| **LED status** | Yes |
| **Control contact terminals** | A1-B1 |
| **Control pulse length min** | 50 ms |
| **Number of functions** | 4 |

## CONNECTION DATA

| | |
|---|---|
| **Cross section single wire from** | 0.2 mm² |
| **Cross section single wire to** | 2.5 mm² |
| **Stripping length** | 10 mm |
| **Torque** | 0.5 |
| **Connection type** | Screw |
| **Relay contact** | 1 CO |
| **Repeatability accuracy** | ± 1% |

## GENERAL DATA


| | |
|---|---|
| **Approvals** | CE |
| **Time range** | 0,1 s - 6 h |
| **Setting accuracy** | ± 5% |
| **IP class** | IP20 |
| **Operating temperature from** | -40 °C |
| **Operating temperature to** | 50 °C |


## DIMENSIONS & MATERIALS


| | |
|---|---|
| **Width** | 6.2 mm |
| **Length** | 94.3 mm |
| **Height TS 35 / 7.5 with base** | 95.4 mm |


## ADDITIONAL DATA


| | |
|---|---|
| **Tariff code** | 85369010 |
| **Country of origin** | EEC |
| **Weight** | 38 g |
| **Pack size** | 10 |

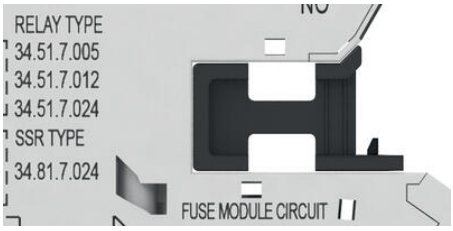


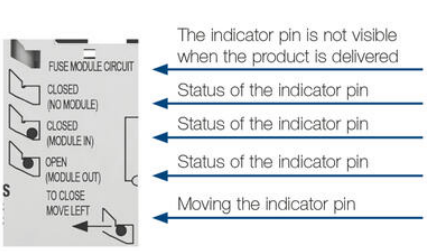


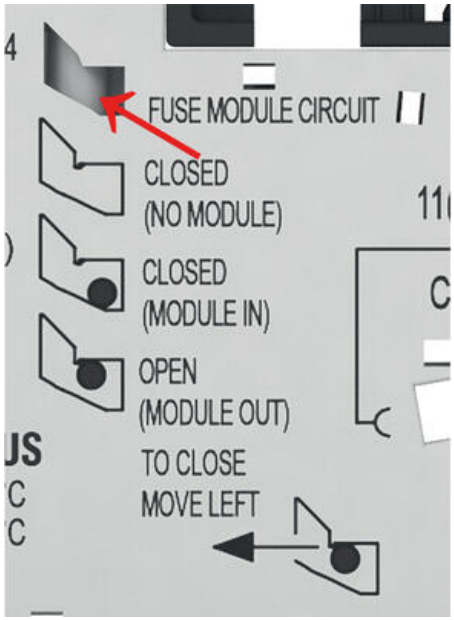
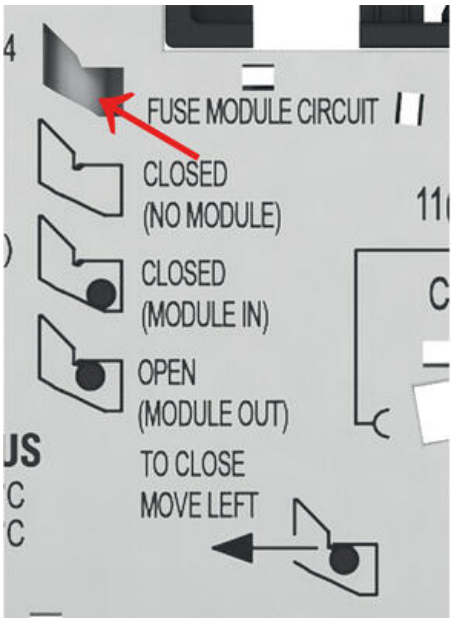


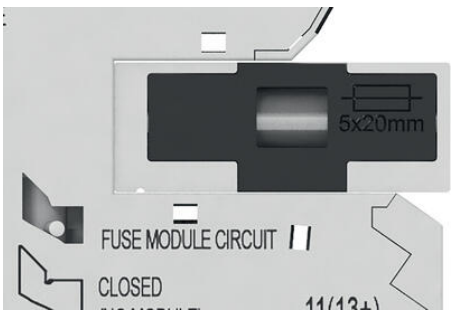
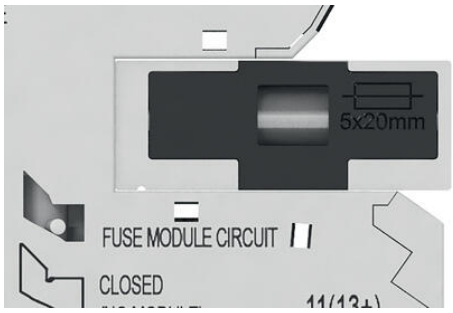


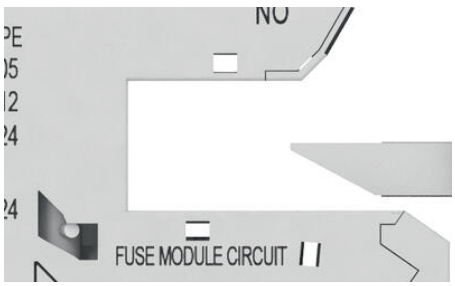
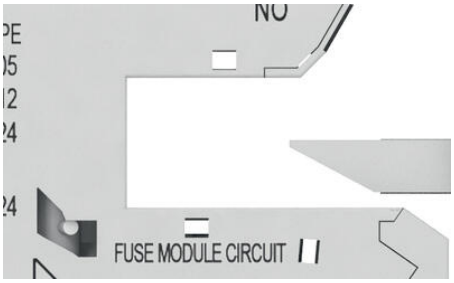


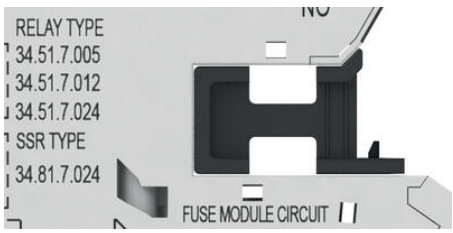

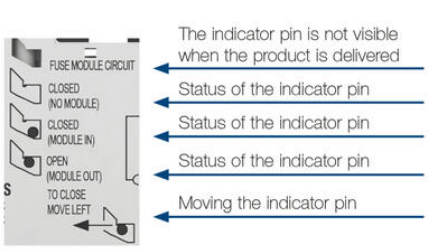FUSE MODULE CIRCUIT
CLOSED
(NO MODULE)
CLOSED
(MODULE IN)
OPEN
(MODULE OUT)
TO CLOSE
MOVE LEFT
The indicator pin is not visible when the product is delivered
Status of the indicator pin
Status of the indicator pin
Status of the indicator pin
Moving the indicator pin


FUSE MODULE CIRCUIT
CLOSED
(NO MODULE)
CLOSED
(MODULE IN)
OPEN
(MODULE OUT)
TO CLOSE
MOVE LEFT


5x20mm
FUSE MODULE CIRCUIT
CLOSED


FUSE MODULE CIRCUIT