


MFR TIMED INTERFACE RELAY WITH FUSED BASE

MFR

16227.2

MFR FIRCP 12...24V AC/DC, Timer relay base, Push-in

- Multifunction timing relay
- 12V or 24V control
- Screw or push-in base

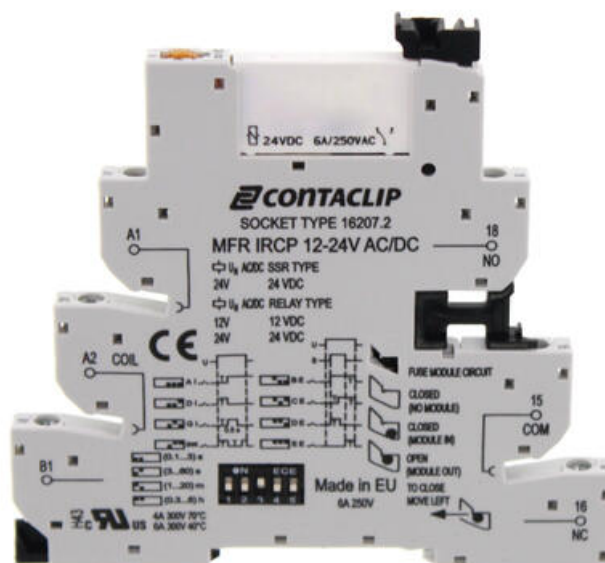

PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Power ac/dc	12 - 24 V
Overvoltage category	III
Contamination degree	3
LED status	Yes
Control contact terminals	A1-B1
Control pulse length min	50 ms
Number of functions	4

CONNECTION DATA

Cross section single wire from	0.2 mm ²
Cross section single wire to	2.5 mm ²
Stripping length	8 mm
Connection type	Push-in
Relay contact	1 CO
Repeatability accuracy	± 1%

GENERAL DATA


Approvals	CE
Time range	0,1 s - 6 h
Setting accuracy	± 5%
IP class	IP20
Operating temperature from	-40 °C
Operating temperature to	50 °C


DIMENSIONS & MATERIALS

Width	6.2 mm
Length	94.3 mm
Height TS 35 / 7.5 with base	95.4 mm

ADDITIONAL DATA

Tariff code	85369010
Country of origin	EEC
Weight	33 g
Pack size	10

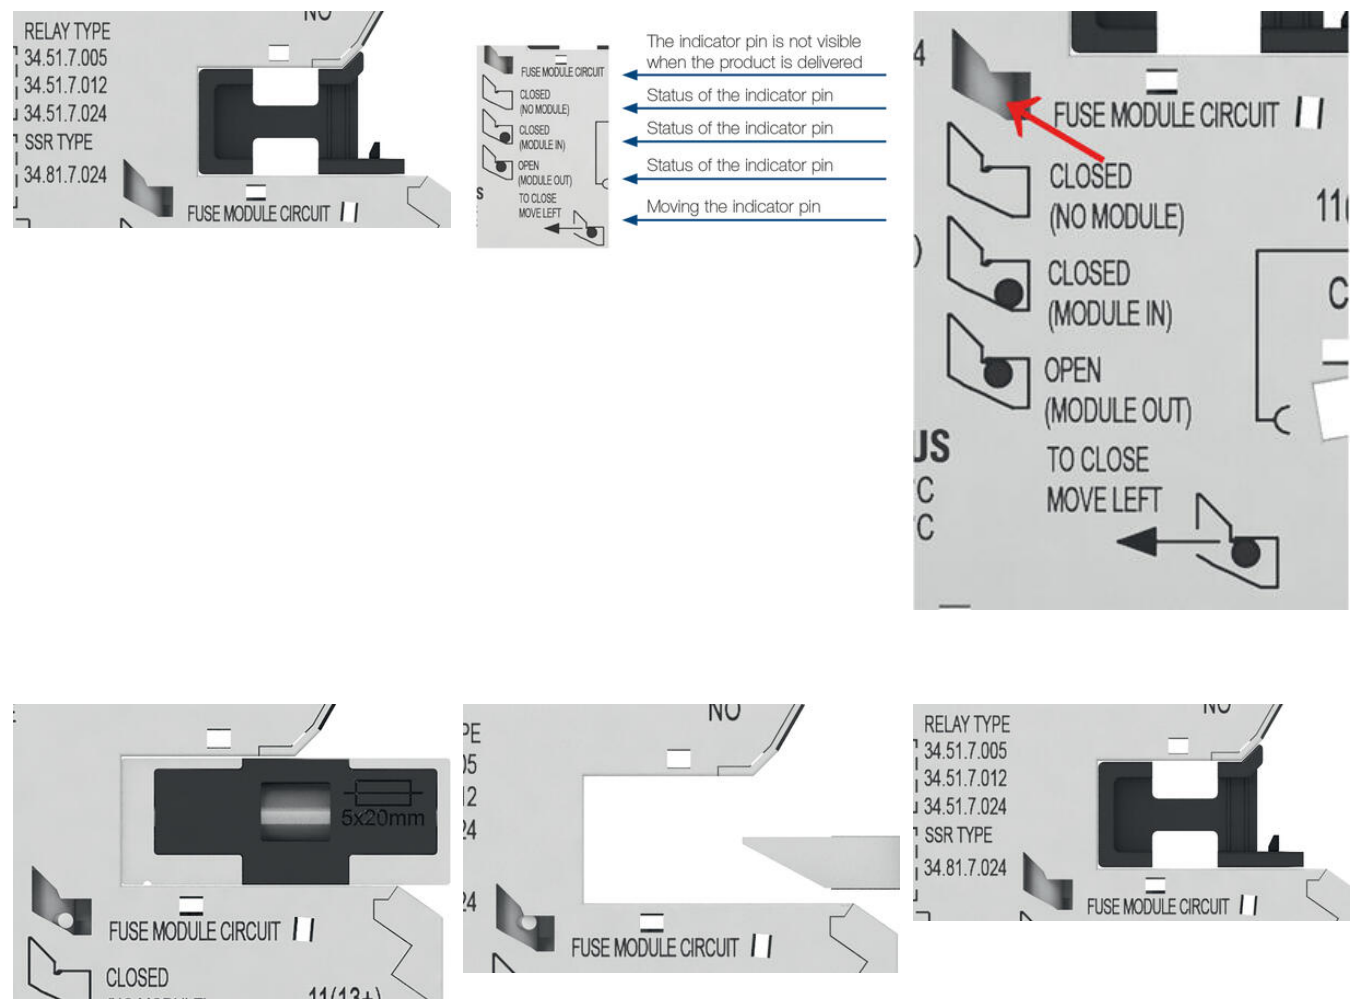



The indicator pin is not visible when the product is delivered

Status of the indicator pin

Status of the indicator pin

Status of the indicator pin

Moving the indicator pin

