OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

COMPACT INTERFACE RELAY IRC PLUS

IRC

16273.2
FIRCPU LW 1/125 V AC/DC, Relay and fused base, Push-in



- TS 35 DIN rail mount
- Compact 6.2 mm wide, plug-in relay
- Fuse module option
- LED indicator
- Plug-in cross connectors

PRODUCT DESCRIPTION

Interface Relays Compact IRC and Multifunction timer relay MFR IRC

Conta Clip has a wide range of compact for 6.2 mm interface relays.
There are five different types of relay versions that provide a flexible, simple to install interface system to suit every requirement.

These can all be used with standard mechanical relays or the popular optocoupler/SSR modules and have a selection of different coloured cross-connection combs to help minimize the installation time.

- The basic version of the **IRCU** is the standard coupling relay and base that can be used in all systems.
- Similar to the basic version, the **IRCPU** has an optional integrated SM-IRC fuse module. It is unique in the way it meets the requirement that each interface relay output must be protected by a replaceable 5x20 mm standard fuse. This limits the effects of over-currents (surges) – such as those caused by cable short circuits and short circuits to the controlled devices .
- The **IRCIU** and **IRCOU** are very similar, but just have a different terminal configuration, this provides the advantage of an additional wire connection that can be cross-connected.

All three wires of a sensor in a PLC input or all wires of an output-side power relay can be connected directly to the coupling relay. This saves space and provides for a clear,

user-friendly speedy installation.

- The MFR-IRCPU is a time-function interface relay with four time ranges and eight time functions. It also features an innovative receptacle for holding additional 5 x 20 mm SM-IRC fuse modules. This component functions as a timer relay with a fuse, in a width of only 6.2 mm.

All five types of relays in the IRC relay system are available with our innovative pressure spring connection system (Push-in) or the established screw connection system.

SMART FUSE SYSTEM

The 'P' versions are supplied with a dummy plug inserted in the frame. The connections for the fuse are bridged internally, so that it can be used without a fuse module. The indicator pin is not visible when the product is delivered.
When the fuse module is plugged in with an inserted fuse (dummy plug has been removed), the fuse is in series with the CO of the output connection.
When the fuse module is pulled out (e.g. due to a failed fuse), the output remains cut off so that the cause of the blown fuse can be found.
In order to reactivate the output, either the fuse module must be fitted with a functional fuse and plugged in again, or the indicator pin must be moved gently in the direction of the arrow on the side of the base, back to as it was supplied initially.

TECHNICAL DATA

INPUT DATA

Rated voltage Un	110-125 V ac/dc
Operating range	0,8-1,1 Un
Holding voltage	0,6 Un ac/dc
Release voltage	0,1 Un
Input power rating	1,1 / 1
Overvoltage category	III
Contamination degree	3
LED status	Yes
Freewheeling diode	Yes

OUTPUT DATA

Contact configuration	1 CO
Contact material	AgNi
Rated V ac / switching V ac max	230 / 400 V ac
Switching capacity max	1500 VA
Contact load min	500 mW
Continuous current max / Inrush current max	6 / 10 A
AC residual current suppression	Yes
Response / release time	12 / 5 ms
Bounce time at close of the NO/NC contact	3/8 ms

CONNECTION DATA

Cross section single wire from	0.2 mm²

Cross section single wire to	2.5 mm²
Stripping length	8 mm
Connection type	Push-in

GENERAL DATA

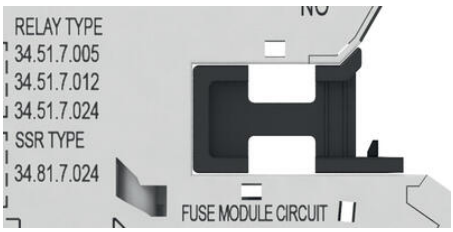
Approvals	CE
Fuse holder	Yes
Test button	No
IP class	IP20
Operating temperature from	-40 °C
Operating temperature to	70 °C
Electrical life in hours (AC1)	60x10³
Mechanical life hours	10x10⁶

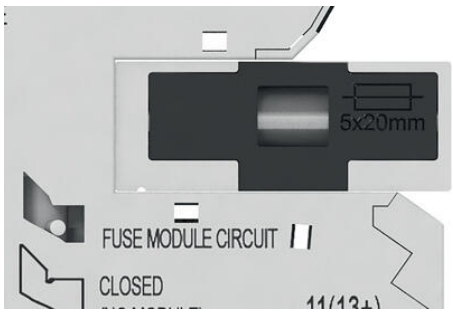
DIMENSIONS & MATERIALS

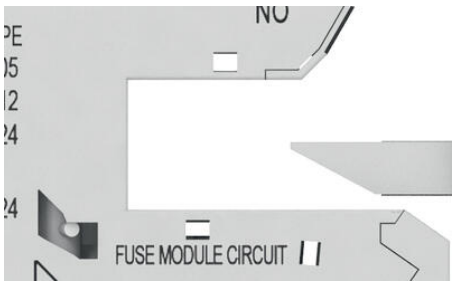
Width	6.2 mm
Length	94.3 mm
Height TS 35 / 7.5 with base	90.7 mm
Flammability class	UL94-V2

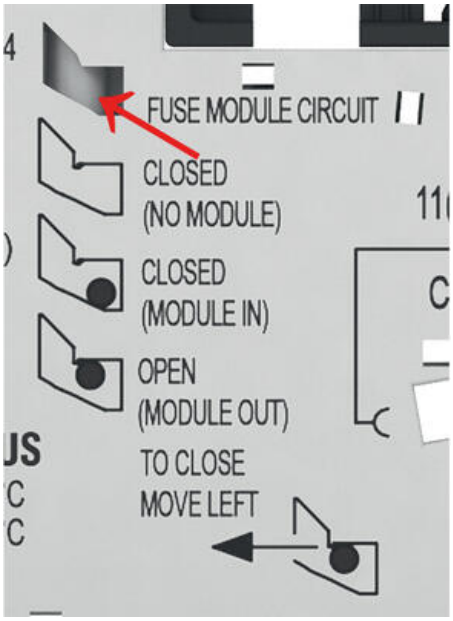
ADDITIONAL DATA

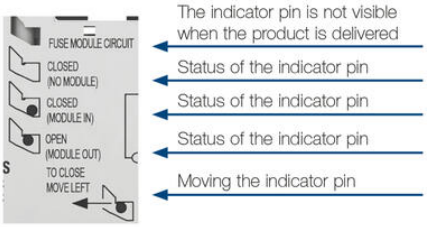
Tariff code	85364900
Country of origin	EEC
Weight	32 g
Pack size	10




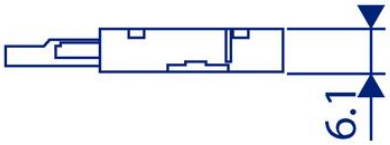


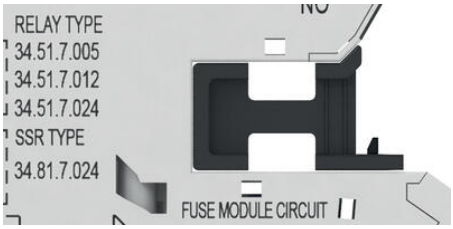


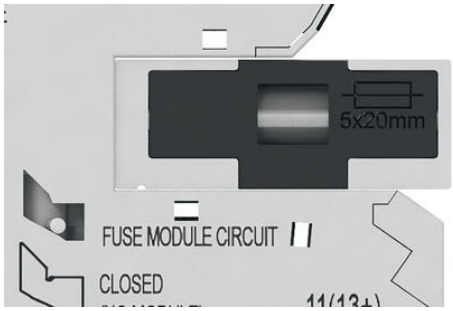

FUSE MODULE CIRCUIT
CLOSED
(NO MODULE)
CLOSED
(MODULE IN)
OPEN
(MODULE OUT)
TO CLOSE
MOVE LEFT

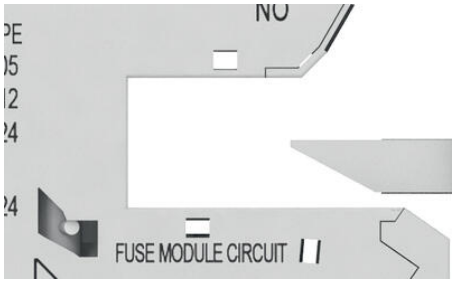

FUSE MODULE CIRCUIT
CLOSED
(NO MODULE)
CLOSED
(MODULE IN)
OPEN
(MODULE OUT)
TO CLOSE
MOVE LEFT
The indicator pin is not visible
when the product is delivered
Status of the indicator pin
Status of the indicator pin
Status of the indicator pin
Moving the indicator pin

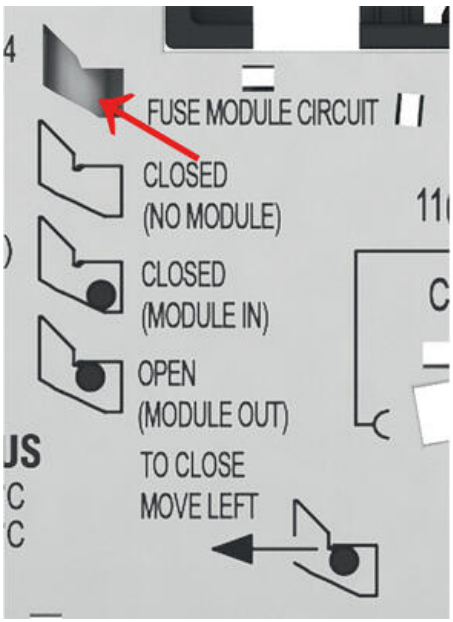

38.3

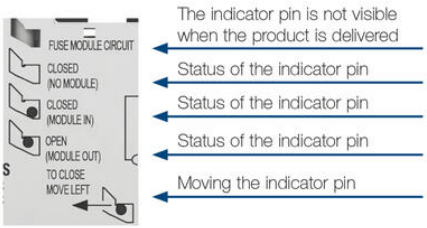

6.1



RELAY TYPE
34.51.7.005
34.51.7.012
34.51.7.024
SSR TYPE
34.81.7.024
FUSE MODULE CIRCUIT

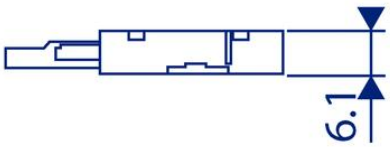

5x20mm
FUSE MODULE CIRCUIT
CLOSED


FUSE MODULE CIRCUIT


FUSE MODULE CIRCUIT
CLOSED
(NO MODULE)
CLOSED
(MODULE IN)
OPEN
(MODULE OUT)
TO CLOSE
MOVE LEFT


FUSE MODULE CIRCUIT
CLOSED
(NO MODULE)
CLOSED
(MODULE IN)
OPEN
(MODULE OUT)
TO CLOSE
MOVE LEFT
The indicator pin is not visible
when the product is delivered
Status of the indicator pin
Status of the indicator pin
Status of the indicator pin
Moving the indicator pin


38.3


6.1