

C12 INTERFACE RELAY

2-pole 5 A - IRC

C12A21X230A

Relay 8 Pin 2 Pole LED 230V ac

- Robust flat pins
- Both mechanical and LED indication
- Colour-coded test button
- Integrated safety components



PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Working Un	0,8-1,10
Nominal power ac	1.1 VA
Coil voltage ac	230 V AC
Voltage min	0.6 V
Overvoltage UNX max	1.1
Response time	10 ms


OUTPUT DATA

Number of contacts	2
Contact material	AgNi + 0,2 µ Au
Breaking Voltage	250 V
Breaking capacity current	5 A
Recommended max load	5 A/250 V AC 1; 0,5A/110 V DC-1
Recommended min load	10 mA/10 V
Mechanical life expectancy	AC: 10Mill/. DC: 20 Mill
Surge current (20 ms)	15 A
Bounce time	1
Release time	5 ms

Release time + contact debounce	8 ms
---------------------------------	------


GENERAL DATA

IP class	IP40
Isolation contact/contact	3000 V
Isolation contact/coil	5000 V
Frequency	50 Hz
Optional coil	X (LED)
Weight	21 g

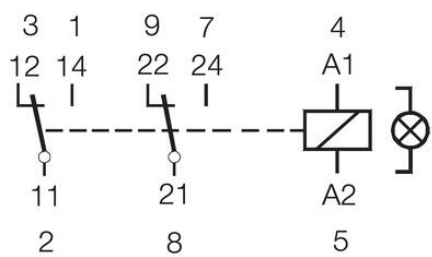


C12-A21X

5A 250V AC-1
5A 30V DC-1



A2 — A1

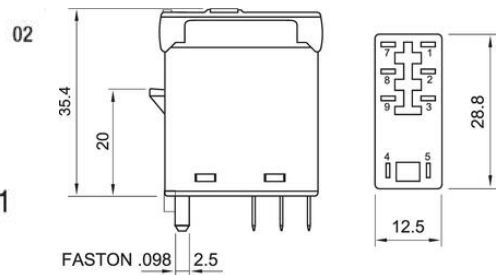

CE EAC
Made in India

