

C12 INTERFACE RELAY

2-pole 5 A - IRC

C12A21BX24AD
Relay 8 Pin 2 Pole LED 24V ac/dc

- Robust flat pins
- Both mechanical and LED indication
- Colour-coded test button
- Integrated safety components



PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Working Un	0,8-1,10
Nominal power ac	1.1 VA
Nominal power dc	0.7 W
Coil voltage ac/dc	24 V AC/DC
Overvoltage UNX max	1.1
Response time	10 ms


OUTPUT DATA

Number of contacts	2
Contact material	AgNi + 0,2 µ Au
Breaking Voltage	250 V
Breaking capacity current	5 A
Recommended max load	5 A/250 V AC 1; 0,5A/110 V DC-1
Recommended min load	10 mA/10 V
Mechanical life expectancy	AC: 10Mill/. DC: 20 Mill
Surge current (20 ms)	15 A
Bounce time	1
Release time	5 ms


Release time + contact debounce	8 ms
---------------------------------	------

GENERAL DATA

IP class	IP40
Isolation contact/contact	3000 V
Isolation contact/coil	5000 V
Frequency	50 Hz
Optional coil	BX (bridge rectifier)
Weight	21 g

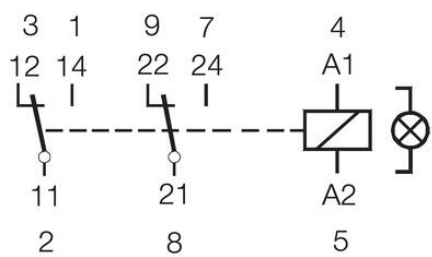

C12-A21BX 02
 5A 250V AC-1
 5A 30V DC-1
 A2 — A1
 1 7
 2 8
 3 9

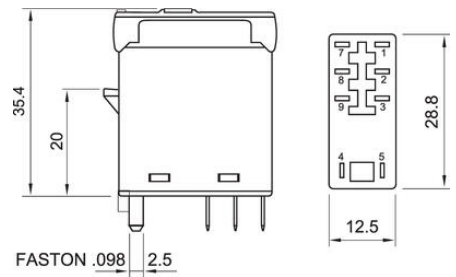

CE EAC
 Made in India

