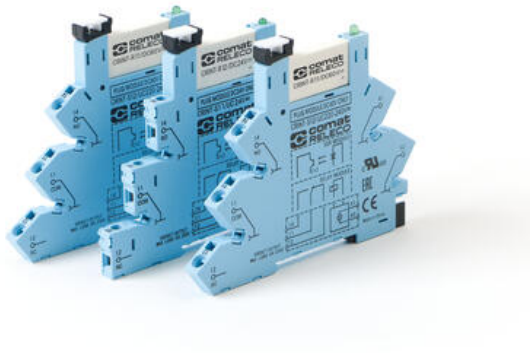
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

INTERFACE MODULE CRINT

CRINT

CRINT-C112/UC24V
Interface Module 1 x C/O 3µ Au Screw 24V ac/dc



- Relay module up to 6A 250 V
- Solid State modules up to 2A
- Screw or cage clamp terminals
- LED status indication

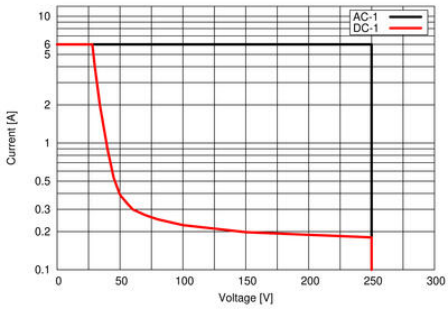
PRODUCT DESCRIPTION

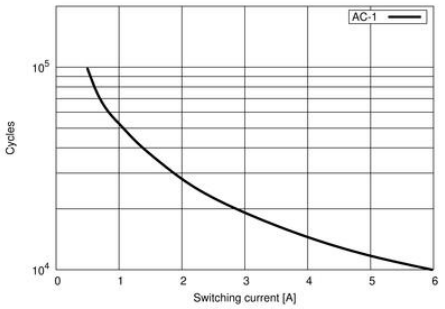
TECHNICAL DATA

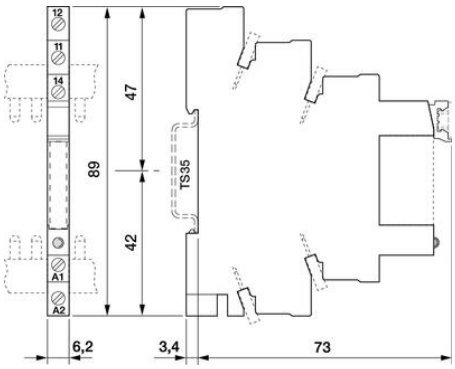
GENERAL DATA


Temperature operational min	-40 °C
Temperature operational max	70 °C
Storage temperature min	-40 °C
Storage temperature max	85 °C
Material	PA6

Number of contacts	1
Working Un	0,8…1,25
Switching power AC1 / 230 V	1500 VA
Switching power AC15 / 230 V	300 VA
Breaking capacity DC1 / 30 V	180 W
Recommended max load	6 A, 250 V AC-1 / 6 A, 30 V DC-1
Recommended min load	10 mA / 6 V
Breaking capacity current	6 A
Coil voltage	24 AC/DC
Contact material	AgSno2 + 3 µ Au
Inrush max	15 A
IP class	IP20

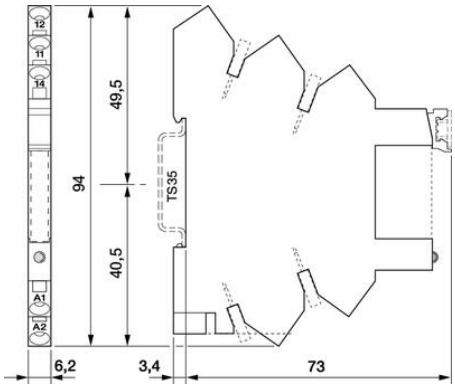

AC-1
DC-1
Current [A]
Voltage [V]

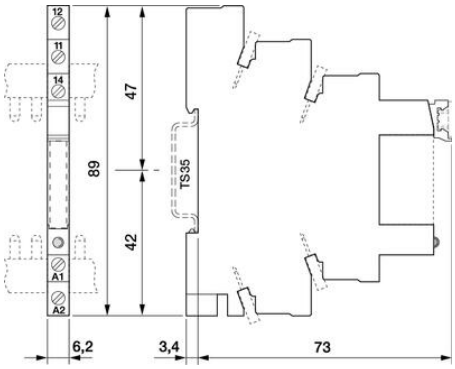

AC-1
Cycles
Switching current [A]



12
11
14
A1
A2
89
47
42
TS35
6,2
3,4
73


20.6
40.2
59.8
71.1
35.7
92.7

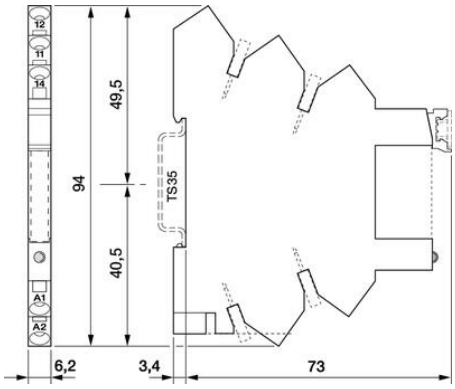

2.1


12
11
14
A1
A2
94
49,5
40,5
TS35
6,2
3,4
73


12
11
14
A1
A2
89
47
42
TS35
6,2
3,4
73


20.6
40.2
59.8
71.1
35.7
92.7


2.1


12
11
14
A1
A2
94
49,5
40,5
TS35
6,2
3,4
73