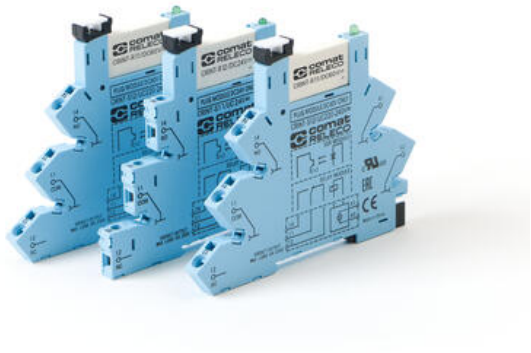
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# INTERFACE MODULE CRINT

CRINT

CRINT-C112/UC100-125V
Interface Module 1 x C/O 3µ Au Screw 110-125V ac/dc



- Relay module up to 6A 250 V
- Solid State modules up to 2A
- Screw or cage clamp terminals
- LED status indication

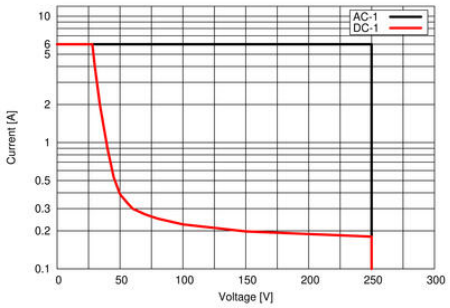
**PRODUCT DESCRIPTION**

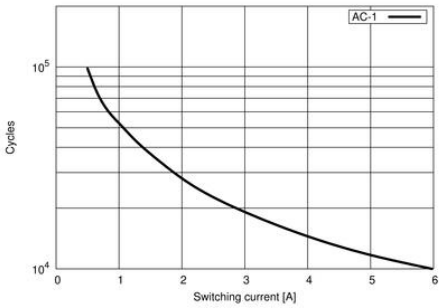
# TECHNICAL DATA

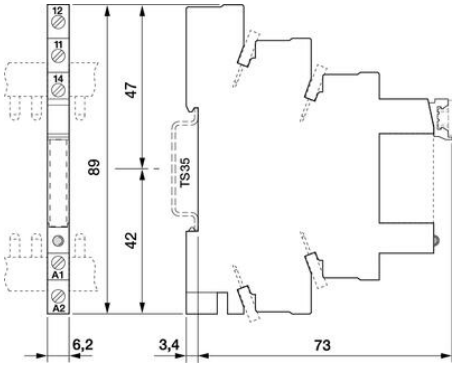
## GENERAL DATA

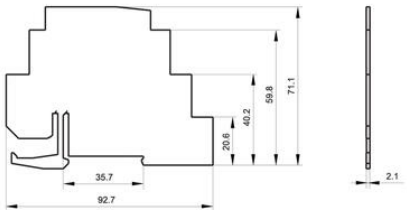
| | |
|---|---|
| **Temperature operational min** | -40 °C |
| **Temperature operational max** | 70 °C |
| **Storage temperature min** | -40 °C |
| **Storage temperature max** | 85 °C |
| **Material** | PA6 |
| **Approvals** | RoHS, CE |

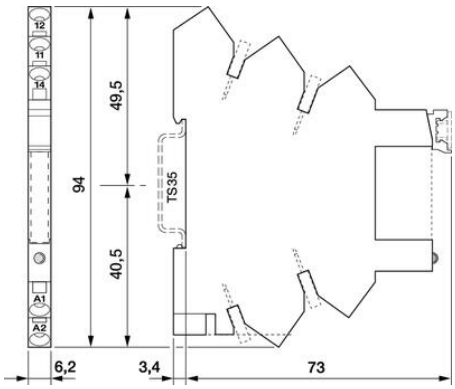
| | |
|---|---|
| **Number of contacts** | 1 |
| **Working Un** | 0,8…1,25 |
| **Switching power AC1 / 230 V** | 1500 VA |
| **Switching power AC15 / 230 V** | 300 VA |
| **Breaking capacity DC1 / 30 V** | 180 W |
| **Recommended max load** | 6 A, 250 V AC-1 / 6 A, 30 V DC-1 |
| **Recommended min load** | 10 mA / 6 V |
| **Breaking capacity current** | 6 A |
| **Coil voltage** | 110-125 AC/DC |
| **Contact material** | AgSno2 + 3 µ Au |
| **Inrush max** | 15 A |
| **IP class** | IP20 |

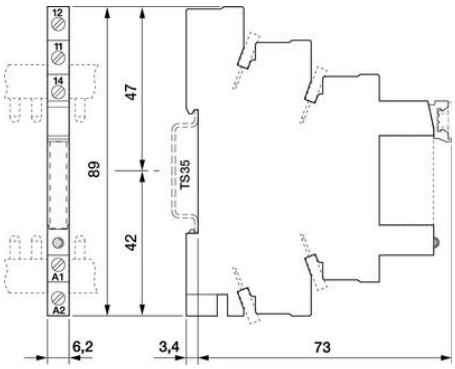

AC-1
DC-1
Current [A]
Voltage [V]

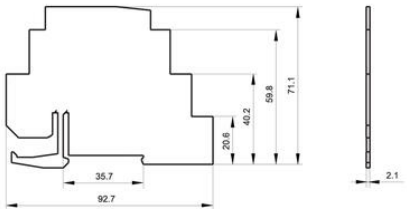

AC-1
Cycles
Switching current [A]

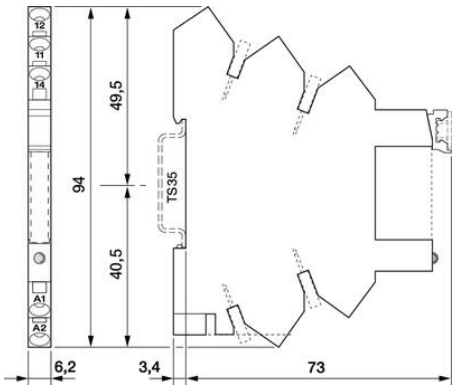

12
11
14
A1
A2
89
47
42
TS35
6,2
3,4
73


20.6
40.2
59.8
71.1
35.7
92.7
2.1


12
11
14
A1
A2
94
49,5
40,5
TS35
6,2
3,4
73


12
11
14
A1
A2
89
47
42
TS35
6,2
3,4
73


20.6
40.2
59.8
71.1
35.7
92.7
2.1


12
11
14
A1
A2
94
49,5
40,5
TS35
6,2
3,4
73