


INTERFACE MODULE CRINT

CRINT

CRINT-C115/DC220-240V

Interface Module SSR DC N/O Screw 220-240V dc

- Relay module up to 6A 250 V
- Solid State modules up to 2A
- Screw or cage clamp terminals
- LED status indication

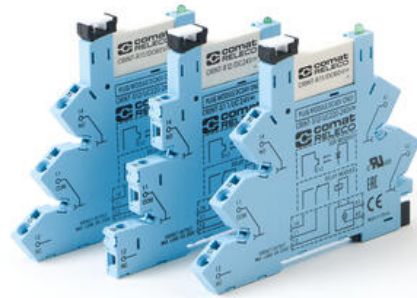

PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Coil voltage	220-240 AC/DC
Working Un	0,8...1,25

OUTPUT DATA

Number of contacts	1
Recommended min load	20 mA / 5 V
Recommended max load	2 A, 24 V DC-1
Breaking capacity current	2 A
Inrush max	48 A

GENERAL DATA

IP class	IP20
Temperature operational min	-30 °C
Temperature operational max	70 °C
Storage temperature min	-40 °C
Storage temperature max	85 °C

DIMENSIONS & MATERIALS

Material	PA6
----------	-----

