


## INTERFACE MODULE CRINT

### CRINT

CRINT-C118/DC48V  
Interface Module SSR AC N/O Screw 48V dc

- Relay module up to 6A 250 V
- Solid State modules up to 2A
- Screw or cage clamp terminals
- LED status indication

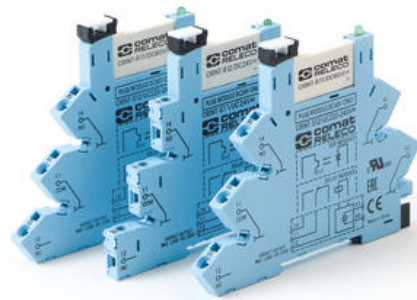

## PRODUCT DESCRIPTION

## TECHNICAL DATA

### INPUT DATA

|              |            |
|--------------|------------|
| Coil voltage | 48 AC/DC   |
| Working Un   | 0,8...1,25 |

### OUTPUT DATA

|                           |                 |
|---------------------------|-----------------|
| Number of contacts        | 1               |
| Recommended min load      | 22 mA / 12 V    |
| Recommended max load      | 1 A, 240 V AC-1 |
| Breaking capacity current | 1 A             |
| Inrush max                | 80 A            |

### GENERAL DATA

|                             |        |
|-----------------------------|--------|
| IP class                    | IP20   |
| Temperature operational min | -30 °C |
| Temperature operational max | 70 °C  |
| Storage temperature min     | -40 °C |
| Storage temperature max     | 85 °C  |

### DIMENSIONS & MATERIALS

|          |     |
|----------|-----|
| Material | PA6 |
|----------|-----|

