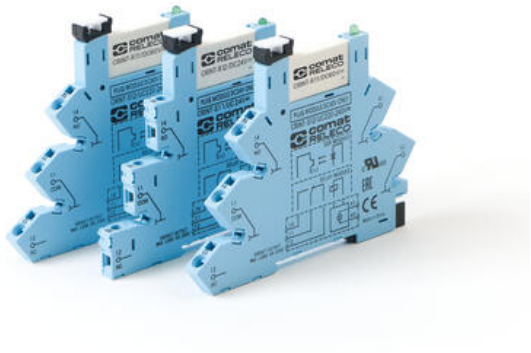
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

INTERFACE MODULE CRINT

CRINT

CRINT-C118/DC100-125V
Interface Module SSR AC N/O Screw 110-125V dc



- Relay module up to 6A 250 V
- Solid State modules up to 2A
- Screw or cage clamp terminals
- LED status indication

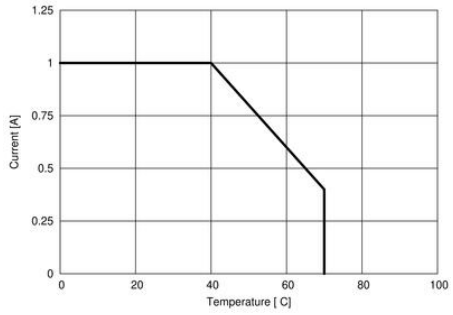
PRODUCT DESCRIPTION

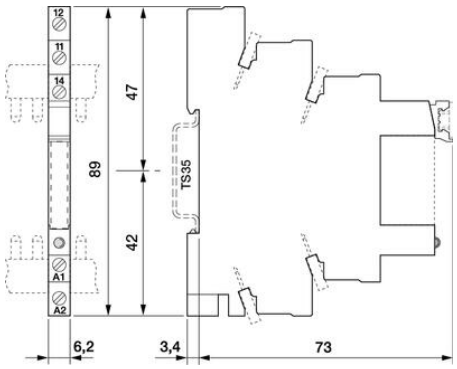
TECHNICAL DATA

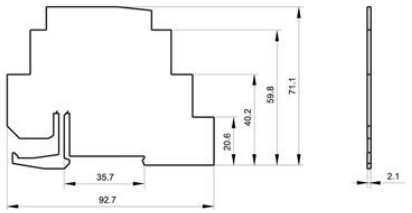
GENERAL DATA

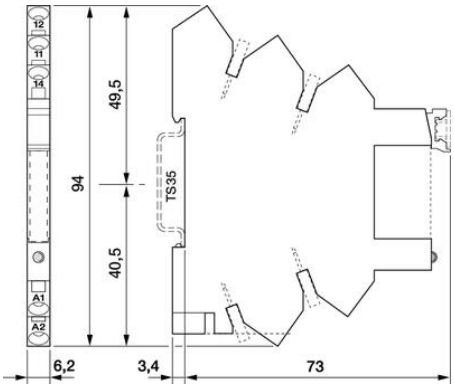
Temperature operational min	-30 °C
Temperature operational max	70 °C
Storage temperature min	-40 °C
Storage temperature max	85 °C
Material	PA6

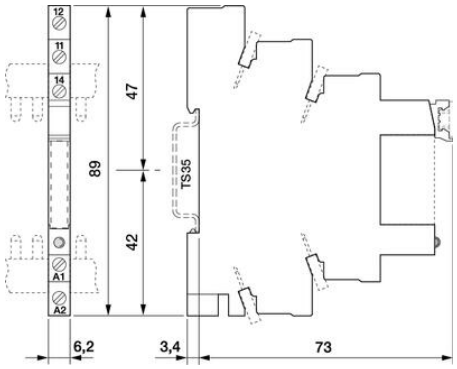
Number of contacts	1
Working Un	0,8…1,25
Recommended max load	1 A, 240 V AC-1
Recommended min load	22 mA / 12 V
Breaking capacity current	1 A
Coil voltage	110-125 AC/DC
Inrush max	80 A
IP class	IP20

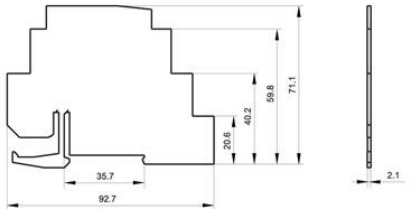

1.25
1
0.75
0.5
0.25
0
Current [A]
0
20
40
60
80
100
Temperature [C]

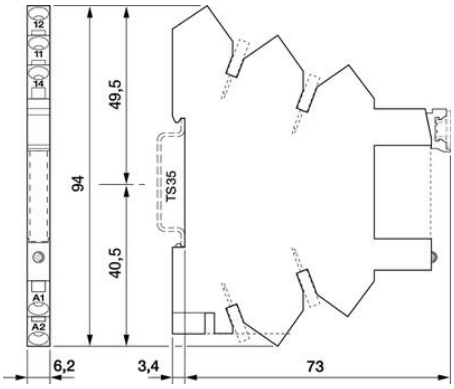

12
11
14
A1
A2
89
47
42
TS35
6,2
3,4
73


71.1
59.8
40.2
20.6
35.7
92.7
2.1


12
11
14
A1
A2
94
49,5
40,5
TS35
6,2
3,4
73


12
11
14
A1
A2
89
47
42
TS35
6,2
3,4
73


71.1
59.8
40.2
20.6
35.7
92.7
2.1


12
11
14
A1
A2
94
49,5
40,5
TS35
6,2
3,4
73