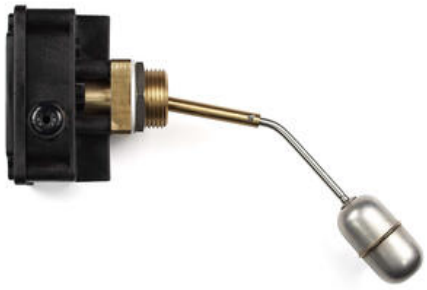
**OEM Automatic Ltd**
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# VALCO - SIDE MOUNT LEVEL SWITCH - S50 SERIES

00.0002.3376.1
Adj. length, Straight rod, Brass/SS, 2xCO, Max 25 bar



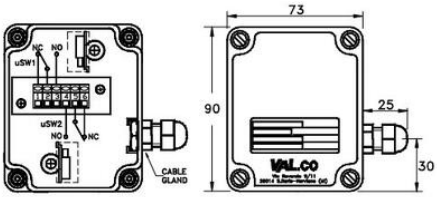
- PP housing with PG9 electrical connection
- Micro-switch SPDT
- Max working pressure 40 bar
- Max working temperature 180°C
- Brass or St. Steel materials

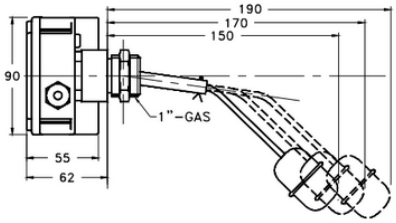
### PRODUCT DESCRIPTION

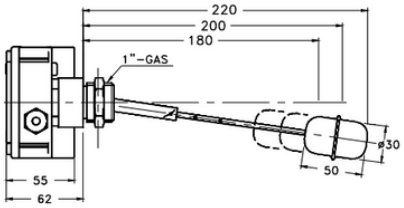
These level switches, with their reduced dimensions and simplicity of installation, constitute a reliable solution for the control of liquids in all applications where it is necessary to mount a lateral type. Suitable for use with process temperature up to 180 ° C.

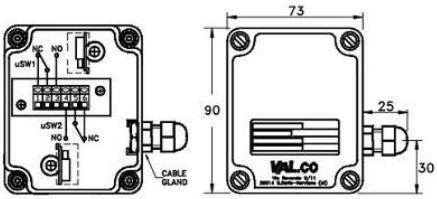
## TECHNICAL DATA

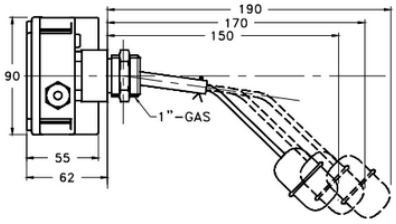
| | |
|---|---|
| **Current** | 3A |
| **Electrical connection** | PG9 cable gland |
| **Function** | Changeover (SPDT) |
| **Hysteresis max** | 20 mm |
| **IP class** | IP65 |
| **Manufacturer part no.** | L2.S50.7.D.25.G.O.W.I33 |
| **Material of body** | Glass fiber reinforced plastic (PBT) |
| **Material of float** | Stainless steel 316 |
| **Material of seals** | PTFE |
| **Material of wetted parts** | Stainless steel |
| **Mounting** | Horizontal |
| **Number of microswitches** | 2 |
| **Pressure max** | 25 bar |
| **Process connection** | G1 |
| **Rod type** | Straight |
| **Specific gravity** | 0.7 |
| **Temperature operational max** | 180 °C |
| **Voltage** | 250Vac/48Vdc |

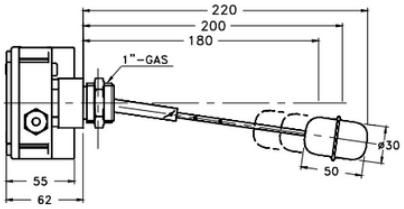

73
90
25
30
NC
NO
uSW1
uSW2
NO
NC
CABLE GLAND


190
170
150
90
1"-GAS
55
62


220
200
180
1"-GAS
ø30
55
62
50


73
90
25
30
NC
NO
uSW1
uSW2
NO
NC
CABLE GLAND


190
170
150
90
1"-GAS
55
62


220
200
180
1"-GAS
ø30
55
62
50