OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

TECNOPLASTIC - FLOAT SWITCH - OLYMPIC

GOL53X105NNC1
Double function, H05 RNF, 5M cable, counterweight



- Maximum depth of 20 metres
- Single or double function
- Up to 60°C
- Compact size


PRODUCT DESCRIPTION

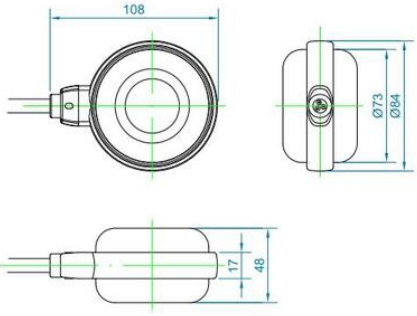
The Olympic level switch from Tecnoplastic is a popular style of level switch when size is a consideration. This level regulator is very cost effective and can be used in many ways for automated control of liquid levels in various applications.


- Water pumps
- Plumbed system automation


TECHNICAL DATA


Activation angle	45 °
Approvals	CE, TÜV
Cable length	5 m
Cable type	H05RN-F
Counterweight included	Yes
Depth max	10 m
Function	Changeover (SPDT)
Insulation class	I-II
IP class	IP68
Material of float	Polypropylene
Operating temperature to	60 °C
Rated current	8 A
Specific gravity	0.6 kg/dm³
Supply voltage	250 V

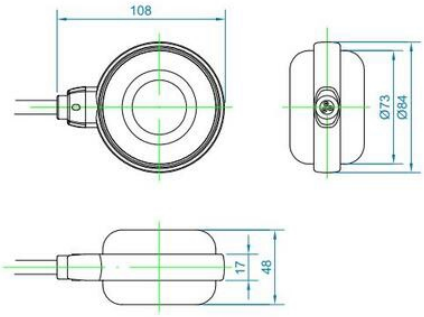

45°


108
Ø73
Ø84
17
48


45°


45°


45°


108
Ø73
Ø84
17
48