OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

TECNOPLASTIC - FLOAT SWITCH - SUPERTEC

GSUH3X120NGC1
Double function, H07 RNF, 20M cable, counterweight



- Maximum depth 40 meters
- Single or double function
- Up to 60°C
- Double chamber design


PRODUCT DESCRIPTION

The Supertec level switch is resistant to high pressure due to its special double chamber construction. This level regulator is for more specialist requirements such deep tanks or where extra protection and integrity are a must.


- Drainage plants
- Pumping stations
- Dirty water systems


TECHNICAL DATA

Activation angle	45 °
Approvals	CE, TÜV
Cable length	20 m
Cable type	H07RN-F
Counterweight included	Yes
Depth max	40 m
Function	Changeover (SPDT)
Insulation class	I-II
IP class	IP68
Material of float	Polypropylene
Operating temperature to	60 °C
Rated current	8 A
Specific gravity	0.7 kg/dm³
Supply voltage	250 V

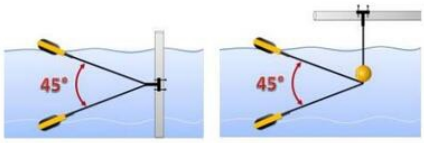

45°
45°

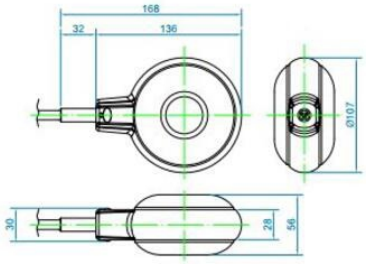


168
32
136
Ø107
30
28
56

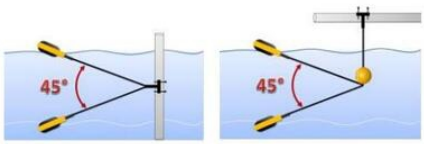
45°
45°

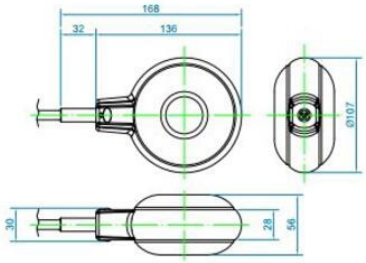


168
32
136
Ø107
30
28
56