OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

TECNOPLASTIC - FLOAT SWITCH - FLOTEC

GFLH3G106NG01
Single function, H07 RNF, 6M cable



- Maximum depth 20 meters
- Single or double function
- Up to 50°C
- Double chamber design

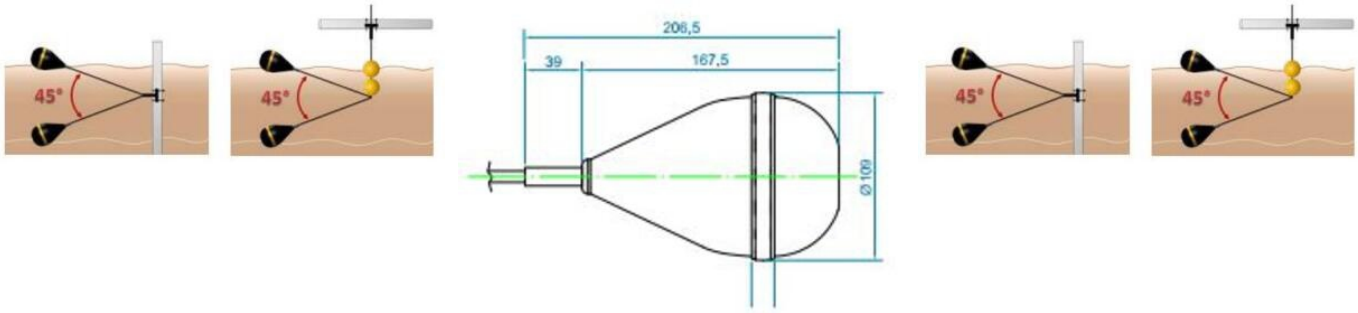
PRODUCT DESCRIPTION

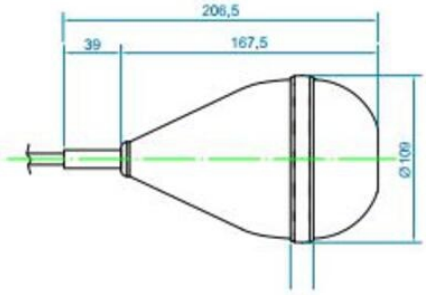
The Flotec level switch is designed for extreme applications where greater buoyancy is required. double chamber construction. This level regulator also features a double chamber design for extra durability and protection and works in the opposite way to the Taurus level switch.

- Drainage plants
- Pumping stations
- Dirty water systems

TECHNICAL DATA

Activation angle	45 °
Approvals	CE, TÜV
Cable length	6 m
Cable type	H07RN-F
Counterweight included	No
Depth max	20 m
Function	N/O & N/C
Insulation class	I-II
IP class	IP68
Material of float	Polypropylene
Operating temperature to	60 °C
Rated current	8 A
Specific gravity	0.7 kg/dm³
Supply voltage	250 V


45°
45°
206,5
39
167,5
Ø 100
45°
45°


206,5
39
167,5
Ø 100