OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

KUEBLER - ABSOLUTE-CODED ANGULAR TRANSMITTER SENDIX 5868/5888, OPTICAL, ETHERCAT, Ø58 MM

SERIE 5868 ETHERCAT



- Housing diameter Ø58 mm
- EtherCAT
- Safety-Lock™
- High enclosure class

PRODUCT DESCRIPTION

Sendix 5868/5888 is a multifarious sensor with EtherCAT in robust design. Thanks to the construction of Safety-Lock ™ as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used both outdoors and in applications where large temperature changes occur

Please refer to the image below for ordering information.

Order code Shaft version — 8.5868 . X X B 2 . B2 12 (Type / a b c d / e)

a *Flange*
1 = clamping flange, IP65 ø 58 mm [2.28"]
3 = clamping flange, IP67 ø 58 mm [2.28"]
2 = synchro flange, IP65 ø 58 mm [2.28"]
4 = synchro flange, IP67 ø 58 mm [2.28"]
5 = square flange, IP65 □63.5 mm [2.5"]
7 = square flange, IP67 □63.5 mm [2.5"]

b *Shaft (ø x L), with flat*
1 = 6 x 10 mm [0.24 x 0.39"] 1)
2 = 10 x 20 mm [0.39 x 0.79"] 2)
3 = 1/4" x 7/8"
4 = 3/8" x 7/8"

c *Interface / power supply*
B = EtherCAT / 10 ... 30 V DC

d *Type of connection*
removable bus terminal cover
2 = 3 x M12 connector, 4-pin

e *Fieldbus profile*
B2= EtherCAT with CoE (CAN over EtherNet)

Optional on request
- Ex 2/22
- surface protection salt spray tested

Order code Hollow shaft — 8.5888 . X X B 2 . B2 12 (Type / a b c d / e)

a *Flange*
1 = with spring element, long, IP65
2 = with spring element, long, IP67
3 = with stator coupling, IP65 ø 65 mm [2.56"]
4 = with stator coupling, IP67 ø 65 mm [2.56"]
5 = with stator coupling, IP65 ø 63 mm [2.48"]
6 = with stator coupling, IP67 ø 63 mm [2.48"]

b *Blind hollow shaft (insertion depth max. 30 mm [1.18"])*
3 = ø 10 mm [0.39"]
4 = ø 12 mm [0.47"]
5 = ø 14 mm [0.55"]
6 = ø 15 mm [0.59"]
8 = ø 3/8"
9 = ø 1/2"

c *Interface / power supply*
B = EtherCAT / 10 ... 30 V DC

d *Type of connection*
removable bus terminal cover
2 = 3 x M12 connector, 4-pin

e *Fieldbus profile*
B2= EtherCAT with CoE (CAN over EtherNet)


Optional on request
- Ex 2/22
- surface protection salt spray tested


;


TECHNICAL DATA


Connection	M12
Housing diameter	58 mm
IP class	IP65, IP67
Mounting	Shoulder


Output	EtherCAT
Resolution MT	Max. 12 bit
Resolution overall	28 bit (default: 25 bit)
Resolution ST	16 bit (default: 13 bit)
Sensor type	Absolute
Shaft diameter max	10 mm
Shaft diameter min	6 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	10 V DC
Temperature operational max	80 °C
Temperature operational min	-40 °C
Version	Multiturn









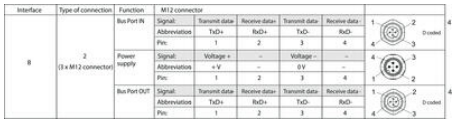

Interface	Type of connection	Function	M12 connector					
B	2 (3 x M12 connector)	Bus Port IN	Signal:	Transmit data+	Receive data+	Transmit data-	Receive data-	1 2 4 3 D-coded
			Abbreviation	TxD+	RxD+	TxD-	RxD-	
			Pin:	1	2	3	4	
		Power supply	Signal:	Voltage +	–	Voltage –	–	4 3 1 2
			Abbreviation	+ V	–	0 V	–	
			Pin:	1	2	3	4	
		Bus Port OUT	Signal:	Transmit data+	Receive data+	Transmit data-	Receive data-	1 2 4 3 D-coded
			Abbreviation	TxD+	RxD+	TxD-	RxD-	
			Pin:	1	2	3	4	