

**KUEBLER - ABSOLUTE-CODED
 ANGULAR TRANSMITTER SENDIX F5868
 / F5888, OPTICAL, CANOPEN, Ø58 MM
 SERIE F5868 CANOPEN**

- Housing diameter Ø58 mm
- CANopen - Interface
- 16 + 16 bit resolution
- -40 to +85 ° C working temperature



PRODUCT DESCRIPTION

Sendix F5868 / F5888 is a series of multivalved optical axes and hole axes with CANopen interface and resolution of up to 32 bits (16 bit multi-color + 16-bit one-turn).

The sensor also has high enclosure, shock resistance and a wide temperature range. The F5868 / F5888 is therefore very suitable for applications where extreme environments or temperatures may occur, such as mobile applications.

Please refer to the image below for ordering information.

Order code	8.F5868	.	X	X	2	X	.	21	2	X
Shaft version	Type		a	b	c	d		e		f

a Flange

1 = clamping flange, IP65 ø 58 mm [2.28"]
 3 = clamping flange, IP67 ø 58 mm [2.28"]
2 = synchro flange, IP65 ø 58 mm [2.28"]
 4 = synchro flange, IP67 ø 58 mm [2.28"]

b Shaft (ø x L), with flat

1 = 6 x 10 mm [0.24 x 0.39"]¹⁾
2 = 10 x 20 mm [0.39 x 0.79"]²⁾
 3 = 1/4" x 7/8"
 4 = 3/8" x 7/8"

c Interface / power supply

2 = CANopen DS301 V4.02 / 10 ... 30 V DC

d Type of connection

A = radial cable, 2 m [6.56"] PVC
 B = radial cable, special length PVC *)
E = 1 x radial M12 connector, 5-pin
 F = 2 x radial M12 connector, 5-pin

*) Available special lengths (connection type B):
 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21"]
 order code expansion .XXXX = length in dm
 ex.: 8.F5868.122B.2123.0030 (for cable length 3 m)

e Fieldbus profile

21 = CANopen

f Options (service)

2 = no option
3 = SET button

Optional on request

- Ex 2/22³⁾
- surface protection salt spray tested

Order code	8.F5888	.	X	X	2	X	.	21	2	X
Hollow shaft	Type		a	b	c	d		e		f

a Flange

1 = with spring element, long, IP65
 2 = with spring element, long, IP67
 3 = with stator coupling, IP65 ø 65 mm [2.56"]
 4 = with stator coupling, IP67 ø 65 mm [2.56"]
5 = with stator coupling, IP65 ø 63 mm [2.48"]
 6 = with stator coupling, IP67 ø 63 mm [2.48"]

b Through hollow shaft

3 = ø 10 mm [0.39"]
4 = ø 12 mm [0.47"]
 5 = ø 14 mm [0.55"]
 6 = ø 15 mm [0.59"]

Blind hollow shaft
 (insertion depth max. 30 mm [1.18"])

B = ø 12 mm¹⁾

c Interface / power supply

2 = CANopen DS301 V4.02 / 10 ... 30 V DC

d Type of connection

L = tangential cable, 2 m [6.56"] PVC
 M = tangential cable, special length PVC *)
E = 1 x radial M12 connector, 5-pin
 F = 2 x radial M12 connector, 5-pin²⁾

*) Available special lengths (connection type M):
 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21"]
 order code expansion .XXXX = length in dm
 ex.: 8.F5888.542M.2123.0030 (for cable length 3 m)

e Fieldbus profile

21 = CANopen

f Options (service)


2 = no option
3 = SET button

Optional on request

- Ex 2/22³⁾ (not for type of connection L, M)
- surface protection salt spray tested

TECHNICAL DATA

Connection	Cable, M12
Housing diameter	58 mm
IP class	IP65, IP67
Mounting	Shoulder
Output	CANopen
Resolution MT	16 bit
Resolution ST	Max: 16 bit, default: 13 bit
Sensor type	Absolute
Shaft diameter max	10 mm
Shaft diameter min	6 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	10 V DC
Temperature operational max	85 °C
Temperature operational min	-40 °C
Version	Multiturn

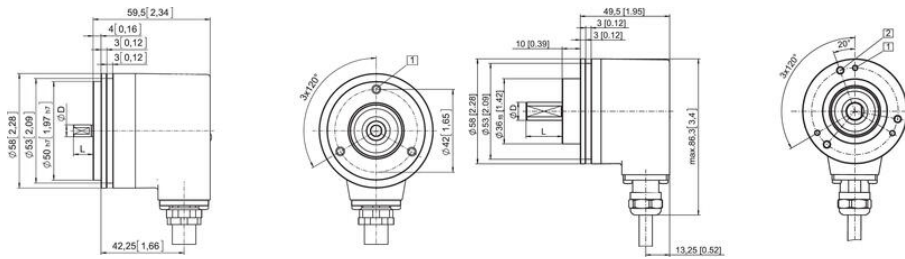

Interface	Type of connection	Function	Cable (Bus terminal cover with terminal box)						
2	A, B, L, M	Bus IN	Signal	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	
			Abbreviation	0 V	+V	CL	CH	CG	
			Cable colour	WH	BN	YE	GN	GY	
Interface	Type of connection	Function	2 x M12 connector						
2	F	Bus IN	Signal	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	2
			Abbreviation	0 V	+V	CL	CH	CG	1
			Pin	3	2	5	4	1	4
		Bus OUT	Signal	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	1
			Abbreviation	0 V	+V	CL	CH	CG	2
			Pin	3	2	5	4	1	3
Interface	Type of connection	Function	1 x M12 connector						
2	E	Bus IN	Signal	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	2
			Abbreviation	0 V	+V	CL	CH	CG	1
			Pin	3	2	5	4	1	4

Interface	Type of connection	Function	Cable (Bus terminal cover with terminal box)						
2	A, B, L, M	Bus IN	Signal	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	
			Abbreviation	0 V	+V	CL	CH	CG	
			Cable colour	WH	BN	YE	GN	GY	
Interface	Type of connection	Function	2 x M12 connector						
2	F	Bus IN	Signal	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	2
			Abbreviation	0 V	+V	CL	CH	CG	1
			Pin	3	2	5	4	1	4
		Bus OUT	Signal	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	1
			Abbreviation	0 V	+V	CL	CH	CG	2
			Pin	3	2	5	4	1	3
Interface	Type of connection	Function	1 x M12 connector						
2	E	Bus IN	Signal	0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND	2
			Abbreviation	0 V	+V	CL	CH	CG	1
			Pin	3	2	5	4	1	4