

LCIS ANALOGUE/ANALOGUE CONVERTER, MV, ADJUSTABLE

750901.0000

LCIS-WAA Converter, mV / std, 24V ac/dc, screw

- 0-60 mV input
- 6,2 mm wide
- 24V AC/DC supply input
- 3-way 2.5 kV insulation



PRODUCT DESCRIPTION


TECHNICAL DATA

Accuracy	0.1 % FSR
Approvals	cULus
Connection type	Screw
Cross section max	2.5 mm ²
Cross section min	0.25 mm ²
Depth	73 mm
Galvanic isolation	3-way
Height	93 mm
Input	0-60 mV
Input/Output protection	Overvoltage input, short circuit output
Insulation	2.5 kV
Insulation voltage in/out	2500 V
IP class	IP20
Linearity	0,05 % FSR
Load impedance	500 Ω
Load impedance voltage	Min. 2 kΩ
Mounting	DIN-Rail

Output	0-10 V, 0-20 mA, 4-20 mA
Reaction time	60 ms
Status indication	Green LED
Storage temperature max	80 °C
Storage temperature min	-40 °C
Supply voltage	24 V AC/DC
Switching frequency max	10 Hz @ 3 dB
Temperature coefficient	<150 ppm/° K FSR
Temperature operational max	60 °C
Temperature operational min	-25 °C
Type of converter	Analogue - analogue
Weight	30 g
Width	6.2 mm

S1	Output
● → Switch On	5 6
0-10V	● ●
0-20mA	● ●
4-20mA	● ●

S1	Input
● → Switch On	1 2 3 4
0-60 mV	

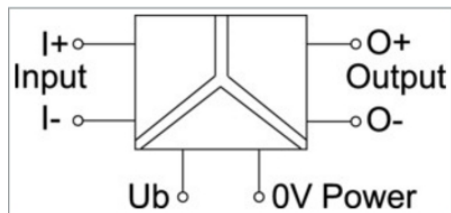

S1	Output
● → Switch On	5 6
0-10V	● ●
0-20mA	● ●
4-20mA	● ●

S1	Input
● → Switch On	1 2 3 4
0-60 mV	

