OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

P30O PROGRAMMABLE TRANSDUCER

Pulse, Frequency and Run Time Transducer

P30O102100M0
P30O TRANSDUCER, PULSE IN, 230V, 23VDCO



- Universal pulse inputs (x2)
- 1 or 2 (option) alarm outputs
- RS485 Slave
- Wide voltage, AC/DC control

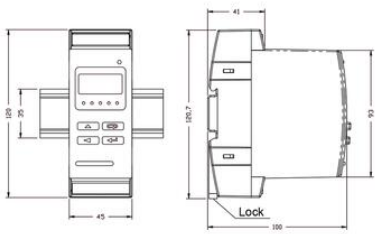
PRODUCT DESCRIPTION

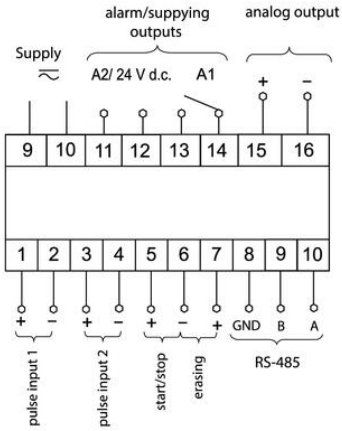
The programmable transducer P30o type has been designed to convert the number of pulses, frequency, period, running time and encoder position into a standard direct current or direct voltage. The transducer has also been fitted with a signal setting function. The output signal is galvanically isolated from the input signal and power supply.
The transducer is fitted with a 2 x 8 LCD screen.

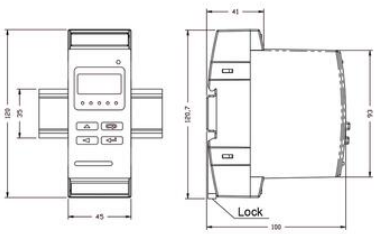
Please refer to the data sheet for ordering keys and contact us for more information.
Part numbers have changed from ending with E0 to M0, please be advised any part numbers below that end in E0 will say M0 in the datasheet. The product is the same.

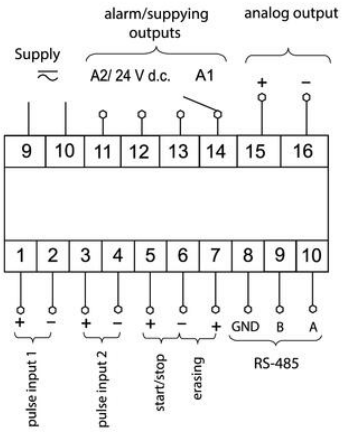
Code	Description
P30O 102100M0	Pulse, frequency, running time P30O analog output 0/4...20mA; 1 x relay; supplying output 24V d.c; supply 85-253V a.c. / 85-300V d.c.; documentation and descriptions in Polish and English, test certificate
P30O 122100M0	Pulse, frequency, running time P30O analog output 0/4...20mA; 1 x relay; supplying output 24V d.c.; Ethernet interface and internal file system memory; zasilanie 85-253V a.c. / 85-300V d.c.; documentation and descriptions in Polish and English, test certificate

;


41
128
35
100,7
93
45
Lock
100


alarm/suppying outputs
analog output
Supply
A2/ 24 V d.c.
A1
+
–
9
10
11
12
13
14
15
16
1
2
3
4
5
6
7
8
9
10
GND
B
A
pulse input 1
pulse input 2
start/stop
erasing
RS-485


41
128
35
100,7
93
45
Lock
100


alarm/suppying outputs
analog output
Supply
A2/ 24 V d.c.
A1
+
–
9
10
11
12
13
14
15
16
1
2
3
4
5
6
7
8
9
10
GND
B
A
pulse input 1
pulse input 2
start/stop
erasing
RS-485