OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

LCIS ANALOGUE/FREQUENCY CONVERTERS, ADJUSTABLE

750512.0000
LCIS-WP-WAF Converter, dc input, freq output, 24-230V ac/dc



- 24-240V AC/DC supply voltage
- 3-way 4 kV insulation
- 6,2 mm wide

PRODUCT DESCRIPTION


TECHNICAL DATA


Accuracy	0.1 % FSR
Approvals	CE, CSA, DNV, GL, RoHS, UL
Connection type	Screw
Cross section max	2.5 mm²
Cross section min	0.25 mm²
Depth	73 mm
Galvanic isolation	3-way
Height	93 mm
Input	0-10 V, 0-20 mA, 4-20 mA
Input impedance current mA	100 Ω
Input impedance voltage	330 kΩ
Input/Output protection	Overvoltage, current input PTC fuse, short circuit-proof output
Insulation	4 kV
Insulation voltage in/out	4000 V
IP class	IP20
Linearity	0,05 % FSR
Load voltage dc max	24 V


Manual switch	No
Mounting	DIN-Rail
Output	0-10 kHz
Status indication	Green LED
Storage temperature max	80 °C
Storage temperature min	-40 °C
Supply voltage	24-240 V AC/DC
Temperature coefficient	<150 ppm/° K FSR
Temperature operational max	60 °C
Temperature operational min	-25 °C
Type of converter	Analogue - frequency
Weight	58 g
Width	6.2 mm

S1	Input			
●→Switch On	1	2	3	4
0–10 V*	●			
0–20 mA		●		
4–20 mA	●	●		

S1	Output	
●→Switch On	5	6
0–50 Hz*		
0–100 Hz	●	
0–1000 Hz		●
0–10000 Hz	●	●

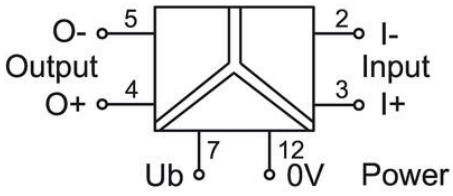



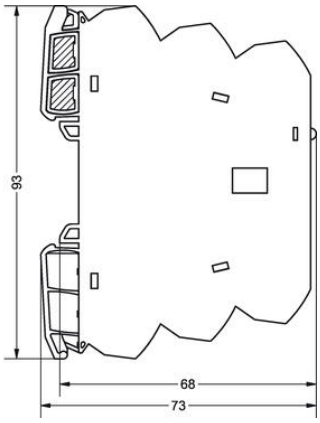

S1	Input			
●→Switch On	1	2	3	4
0–10 V*	●			
0–20 mA		●		
4–20 mA	●	●		

S1	Output	
●→Switch On	5	6
0–50 Hz*		
0–100 Hz	●	
0–1000 Hz		●
0–10000 Hz	●	●

