


HALOGEN FREE CABLE TRUNKING

VK-HF

17840.6
VK-HF 25x30, Halogen free cable trunking, 64m per pack

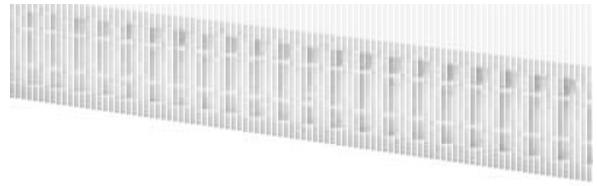

- Halogen free plastic in accordance with VDE 0472, part 815
- Light Grey RAL7035
- -25°C...+70°C
- Meets Rail standards NF F 16-101, F2 and I3
- Base cut outs in accordance with DIN EN 50085-2-3

PRODUCT DESCRIPTION

Halogen-free cabling trunking is often installed in sensitive areas and public buildings such as in airports, railway stations, office buildings, high-rise buildings and hospitals. The halogen-free plastic used by CONTA CLIP is compliant with VDE 0472 part 815 and generates no toxic gases when burned. .

The pegs and the duct base have pre-determined breakage points so that the cabling ducts can easily be modified for your cabling.

Material: Halogen-free plastic in accordance with VDE 0472, part 815 No toxic gases in event of fire Fulfils the requirements in F2 and I3 of the NF F 16-101 Railway Standards.

TECHNICAL DATA

GENERAL DATA

Width	30 mm
Height	30 mm
Colour	Light grey
RAL code	7035
With lid	Yes

DIMENSIONS

Width of slot	4.5 mm
Inner width	27 mm
Inner height	27 mm
Length	2000 mm

Mounting	Rivet
----------	-------

MATERIALS


Material	PC-ABS
Flammability class	UL94-V0
Halogen-free	Yes
Cadmium free	Yes
Silicone-free	Yes
Lead free	Yes
Operating temperature from	-25 °C
Operating temperature to	90 °C

ADDITIONAL DATA

Tariff code	39259020
Country of origin	DE
Weight	198.59 g
Pack size	64

VDE test standard	Entspricht EN 50085-2-3
-------------------	-------------------------


Base holes DIN EN 50085-2-3



from 80 mm

up to 60 mm


Dimensional drawings
Height / side profile

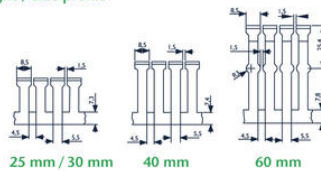

25 mm / 30 mm

40 mm


60 mm



80 mm

100 mm


Base holes DIN EN 50085-2-3



from 80 mm


up to 60 mm

Dimensional drawings
Height / side profile




25 mm / 30 mm

40 mm



60 mm



80 mm

100 mm