
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# CABLE TRUNKING VK

Cable Trunking - VK

17803.6
VK 60x40, Cable trunking, 36m per pack

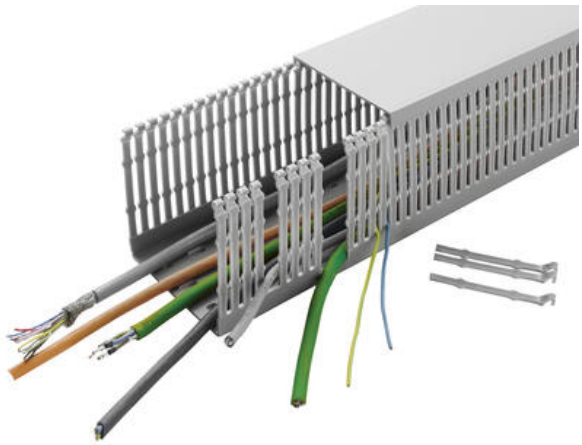

- Self-extinguishing - UL 94 V-0
- Temperature range: -15° C…+60° C
- Delivered length: 2m, with cover, other lengths on request
- 90° cover contour
- Base cut outs in accordance with DIN EN 50085-2-3

### PRODUCT DESCRIPTION

CONTA-CLIP offers a wide range of cable trunking for a variety of different installation applications. The trunking has excellent dimensional stability and is burr free to prevent damage to cables and the installer. They also feature tight fitting covers which are easy to snap on and off. The pegs have pre-determined breakage points so that the cable trunking can easily be modified for your cabling. They are available in various sizes and in a halogen-free version.

- Material: Rigid lead-free, silicone-free a & cadmium-free PVC, flame retardant, in accordance with UL 94 V-0, Self-extinguishing.
- Colour: grey (RAL 7030)
- UL File No. E468415

# TECHNICAL DATA

## GENERAL DATA

| | |
|---|---|
| **Width** | 60 mm |
| **Height** | 40 mm |
| **Colour** | Grey RAL 7030 |
| **With lid** | Yes |

## DIMENSIONS

| | |
|---|---|
| **Width of slot** | 4 mm |
| **Inner width** | 56 mm |
| **Inner height** | 37 mm |
| **Length** | 2000 mm |
| **Mounting** | Rivet / screw |

## MATERIALS

| | |
|---|---|
| **Material** | PVC-U |
| **Flammability class** | UL94-V0 |

| | |
|---|---|
| **Cadmium free** | Yes |
| **Silicone-free** | Yes |
| **Lead free** | Yes |
| **Operating temperature from** | -15 °C |
| **Operating temperature to** | 60 °C |

## APPROVALS

| | |
|---|---|
| **Approvals** | CE, UL, VDE |

## ADDITIONAL DATA

| | |
|---|---|
| **Tariff code** | 39259020 |
| **Country of origin** | TR |
| **Weight** | 505 g |
| **Pack size** | 36 |

