


CABLE TRUNKING VK

VK

17809.6

VK 120x60, Cable trunking, 16m per pack

- Self-extinguishing - UL 94 V-0
- Temperature range: -15° C...+60° C
- Delivered length: 2m, with cover, other lengths on request
- 90° cover contour
- Base cut outs in accordance with DIN EN 50085-2-3

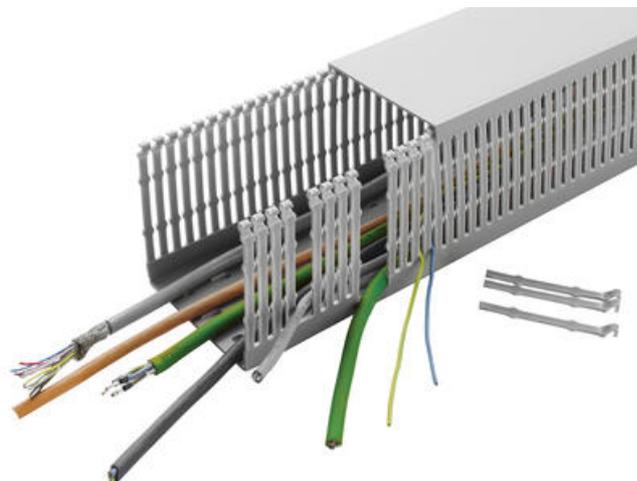

PRODUCT DESCRIPTION

CONTA-CLIP offers a wide range of cable trunking for a variety of different installation applications. The trunking has excellent dimensional stability and is burr free to prevent damage to cables and the installer. They also feature tight fitting covers which are easy to snap on and off. The pegs have pre-determined breakage points so that the cable trunking can easily be modified for your cabling. They are available in various sizes and in a halogen-free version.

- Material: Rigid lead-free, silicone-free & cadmium-free PVC, flame retardant, in accordance with UL 94 V-0, Self-extinguishing.
- Colour: grey (RAL 7030)
- UL File No. E468415

TECHNICAL DATA

GENERAL DATA

Width	120 mm
Height	60 mm
Colour	Grey RAL 7030
With lid	Yes

DIMENSIONS

Width of slot	4 mm
Inner width	115 mm
Inner height	56 mm
Length	2000 mm
Mounting	Rivet / screw

MATERIALS

Material	PVC-U
----------	-------

Flammability class	UL94-V0
Cadmium free	Yes
Silicone-free	Yes
Lead free	Yes
Operating temperature from	-15 °C
Operating temperature to	60 °C




APPROVALS

Approvals	CE, UL, VDE
-----------	-------------

ADDITIONAL DATA

Tariff code	39259020
Country of origin	TR
Weight	1050 g
Pack size	16

Base holes EN 50085-2-3

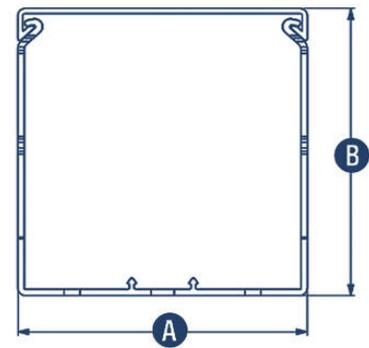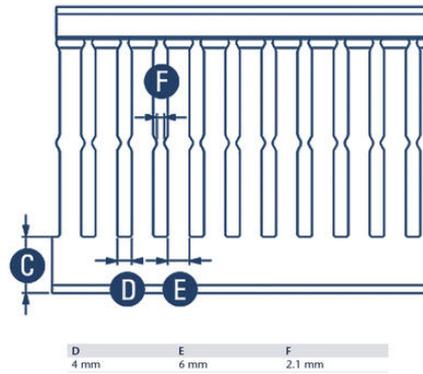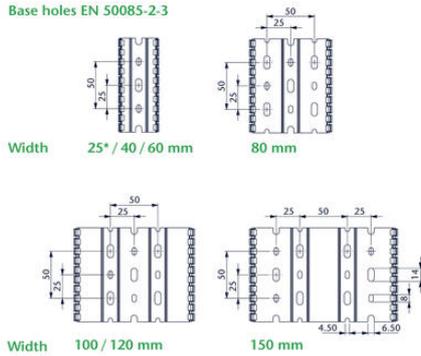

Base holes EN 50085-2-3

