


## HALOGEN FREE CABLE TRUNKING

VK-HF

17858.6

VK-HF 60x100, Halogen free cable trunking, 32m per pack

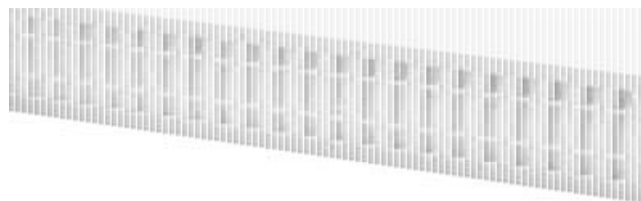

- Halogen free plastic in accordance with VDE 0472, part 815
- Light Grey RAL7035
- -25°C...+70°C
- Meets Rail standards NF F 16-101, F2 and I3
- Base cut outs in accordance with DIN EN 50085-2-3

### PRODUCT DESCRIPTION

Halogen-free cabling trunking is often installed in sensitive areas and public buildings such as in airports, railway stations, office buildings, high-rise buildings and hospitals. The halogen-free plastic used by CONTA CLIP is compliant with VDE 0472 part 815 and generates no toxic gases when burned. .

The pegs and the duct base have pre-determined breakage points so that the cabling ducts can easily be modified for your cabling.

Material: Halogen-free plastic in accordance with VDE 0472, part 815 No toxic gases in event of fire Fulfils the requirements in F2 and I3 of the NF F 16-101 Railway Standards.

## TECHNICAL DATA

### GENERAL DATA

Width	60 mm
Height	100 mm
Colour	Light grey
RAL code	7035
With lid	Yes

### DIMENSIONS

Width of slot	4.5 mm
Inner width	56 mm
Inner height	96 mm

Length	2000 mm
Mounting	Rivet


### MATERIALS

Material	PC-ABS
Flammability class	UL94-V0
Halogen-free	Yes
Cadmium free	Yes
Silicone-free	Yes
Lead free	Yes
Operating temperature from	-25 °C
Operating temperature to	90 °C


### ADDITIONAL DATA

Tariff code	39259020
Country of origin	DE
Weight	688.13 g
Pack size	32
VDE test standard	Entspricht EN 50085-2-3


Base holes DIN EN 50085-2-3




Dimensional drawings  
Height / side profile

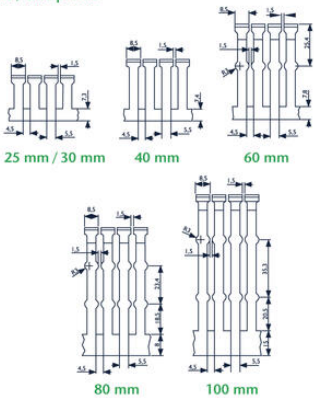


Base holes DIN EN 50085-2-3



Dimensional drawings  
Height / side profile



25 mm / 30 mm    40 mm    60 mm



80 mm    100 mm