


HALOGEN FREE CABLE TRUNKING

VK-HF

17870.6

VK-HF-D 25mm, wide Halogen free trunking cover, 10m per pack

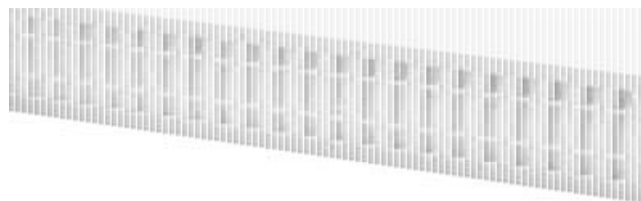

- Halogen free plastic in accordance with VDE 0472, part 815
- Light Grey RAL7035
- -25°C...+70°C
- Meets Rail standards NF F 16-101, F2 and I3
- Base cut outs in accordance with DIN EN 50085-2-3

PRODUCT DESCRIPTION

Halogen-free cabling trunking is often installed in sensitive areas and public buildings such as in airports, railway stations, office buildings, high-rise buildings and hospitals. The halogen-free plastic used by CONTA CLIP is compliant with VDE 0472 part 815 and generates no toxic gases when burned. .

The pegs and the duct base have pre-determined breakage points so that the cabling ducts can easily be modified for your cabling.

Material: Halogen-free plastic in accordance with VDE 0472, part 815 No toxic gases in event of fire Fulfils the requirements in F2 and I3 of the NF F 16-101 Railway Standards.

TECHNICAL DATA

GENERAL DATA

Width	25 mm
Colour	Light grey
RAL code	7035

DIMENSIONS

Inner width	22 mm
Length	2000 mm

MATERIALS


Material	PC-ABS
Flammability class	UL94-V0

Halogen-free	Yes
Cadmium free	Yes
Silicone-free	Yes
Lead free	Yes
Operating temperature from	-25 °C
Operating temperature to	90 °C


ADDITIONAL DATA

Tariff code	39259020
Country of origin	DE
Weight	160 g
Pack size	10
VDE test standard	Entspricht EN 50085-2-3


Base holes DIN EN 50085-2-3



Dimensional drawings
Height / side profile

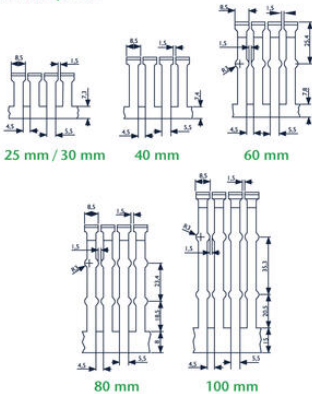

Base holes DIN EN 50085-2-3



Dimensional drawings
Height / side profile

