


CABLE TRUNKING VK

VK

98526.0
 Sample Box of VK Trunking, 100x60, 60x80 & 25x100,
 200mm long

- Self-extinguishing - UL 94 V-0
- Temperature range: -15° C...+60° C
- Delivered length: 2m, with cover, other lengths on request
- 90° cover contour
- Base cut outs in accordance with DIN EN 50085-2-3

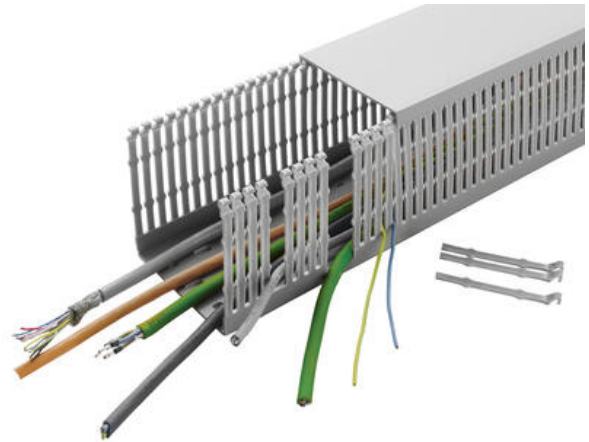

PRODUCT DESCRIPTION

CONTA-CLIP offers a wide range of cable trunking for a variety of different installation applications. The trunking has excellent dimensional stability and is burr free to prevent damage to cables and the installer. They also feature tight fitting covers which are easy to snap on and off. The pegs have pre-determined breakage points so that the cable trunking can easily be modified for your cabling. They are available in various sizes and in a halogen-free version.

- Material: Rigid lead-free, silicone-free a & cadmium-free PVC, flame retardant, in accordance with UL 94 V-0, Self-extinguishing.
- Colour: grey (RAL 7030)
- UL File No. E468415

TECHNICAL DATA

GENERAL DATA

Colour	Grey RAL 7030
With lid	Yes

DIMENSIONS

Width of slot	4 mm
Length	200 mm
Mounting	Rivet / screw

MATERIALS

Material	PVC-U
Flammability class	UL94-V0
Cadmium free	Yes
Silicone-free	Yes
Lead free	Yes
Operating temperature from	-15 °C

Operating temperature to	60 °C
--------------------------	-------

APPROVALS


Approvals	CE, UL, VDE
-----------	-------------

ADDITIONAL DATA

Tariff code	39259020
Country of origin	TR
Weight	763 g
Pack size	3


Additional information	contains 1 x 100x60, 1 x 60x80 & 1 x 25x100 in 200mm lengths
------------------------	--

Base holes EN 50085-2-3




Width 25* / 40 / 60 mm

80 mm

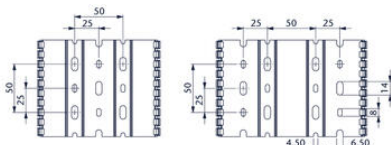


Width 100 / 120 mm


150 mm

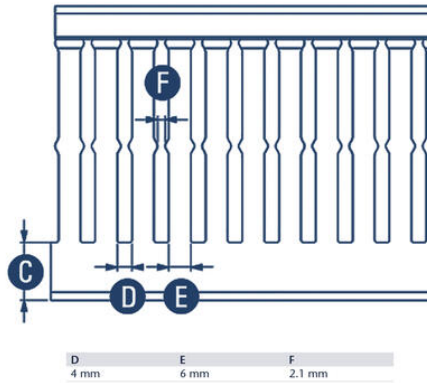

D 4 mm E 6 mm F 2.1 mm

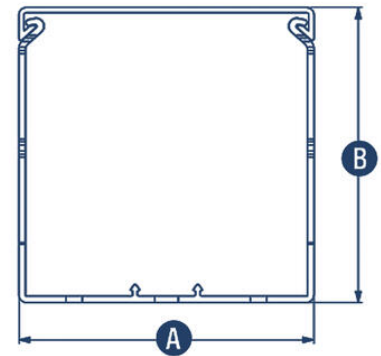


Base holes EN 50085-2-3




Width 25* / 40 / 60 mm

80 mm

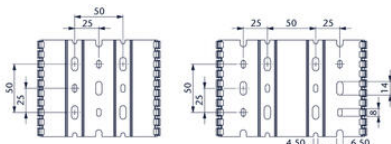

Width 100 / 120 mm

150 mm

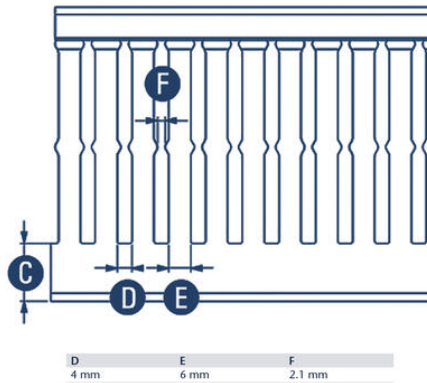

D 4 mm E 6 mm F 2.1 mm

