


## CABLE TRUNKING VK

VK

17800.6  
 VK 25x30, Cable trunking, 100m per pack

- Self-extinguishing - UL 94 V-0
- Temperature range: -15° C...+60° C
- Delivered length: 2m, with cover, other lengths on request
- 90° cover contour
- Base cut outs in accordance with DIN EN 50085-2-3

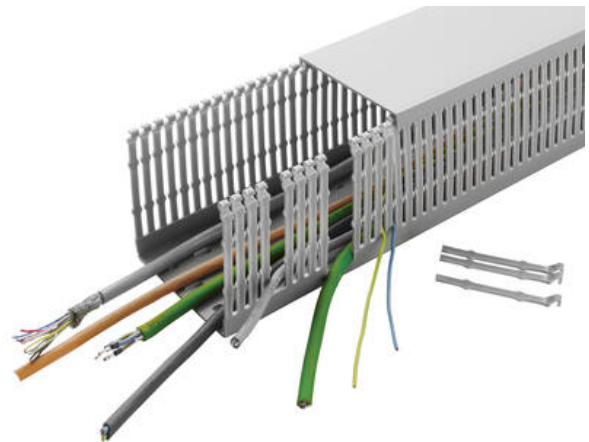

### PRODUCT DESCRIPTION

CONTA-CLIP offers a wide range of cable trunking for a variety of different installation applications. The trunking has excellent dimensional stability and is burr free to prevent damage to cables and the installer. They also feature tight fitting covers which are easy to snap on and off. The pegs have pre-determined breakage points so that the cable trunking can easily be modified for your cabling. They are available in various sizes and in a halogen-free version.

- Material: Rigid lead-free, silicone-free a & cadmium-free PVC, flame retardant, in accordance with UL 94 V-0, Self-extinguishing.
- Colour: grey (RAL 7030)
- UL File No. E468415

## TECHNICAL DATA

### GENERAL DATA

Width	25 mm
Height	30 mm
Colour	Grey RAL 7030
With lid	Yes

### DIMENSIONS

Width of slot	4 mm
Inner width	22 mm
Inner height	27 mm
Length	2000 mm
Mounting	Rivet / screw

### MATERIALS

Material	PVC-U
Flammability class	UL94-V0

Cadmium free	Yes
Silicone-free	Yes
Lead free	Yes
Operating temperature from	-15 °C
Operating temperature to	60 °C


## APPROVALS

Approvals	CE, UL, VDE
-----------	-------------

## ADDITIONAL DATA


Tariff code	39259020
Country of origin	TR
Weight	240.63 g
Pack size	100

Base holes EN 50085-2-3

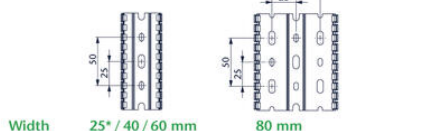


Width 25\* / 40 / 60 mm

80 mm

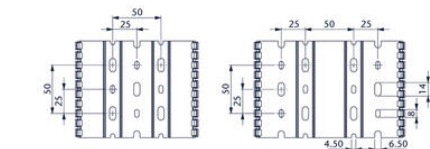


Width 100 / 120 mm


150 mm

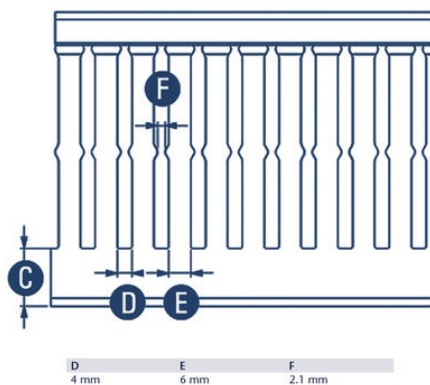

D 4 mm E 6 mm F 2.1 mm

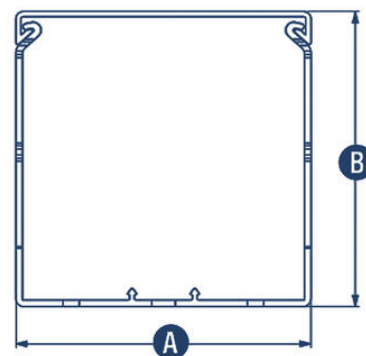


Base holes EN 50085-2-3

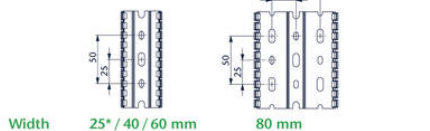


Width 25\* / 40 / 60 mm

80 mm

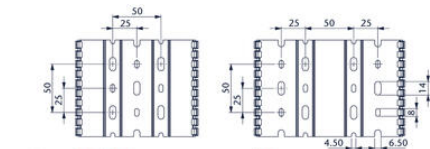

Width 100 / 120 mm

150 mm

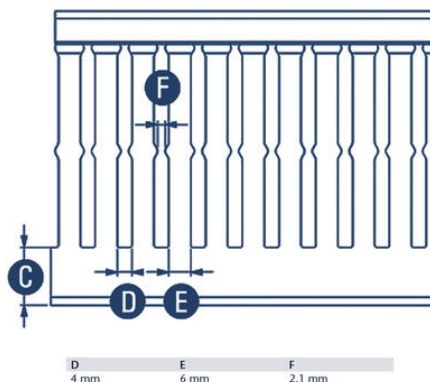

D 4 mm E 6 mm F 2.1 mm

