OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

KUBLER SLIP RING SRI085

SRI085.D0835
Slip Rng SRI085-25-01-02-1101-V100



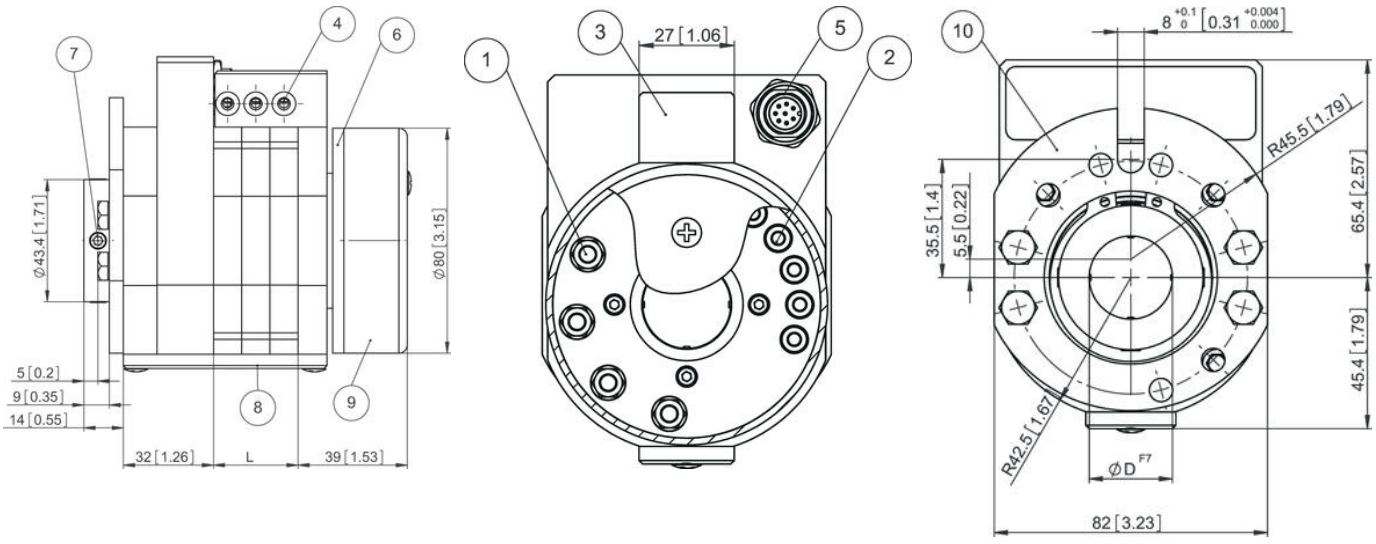
- Modular system
- Maintenance-free signal transmission
- Lifespan 500 million revolutions
- Two-chamber system

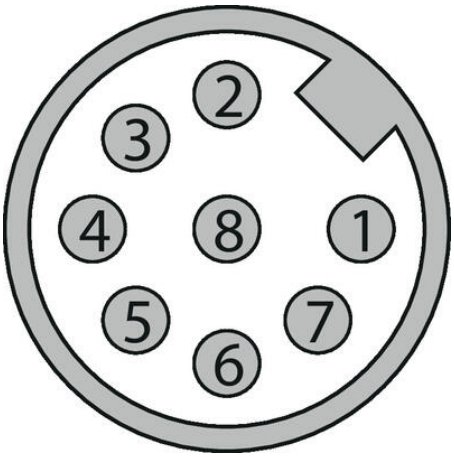
PRODUCT DESCRIPTION

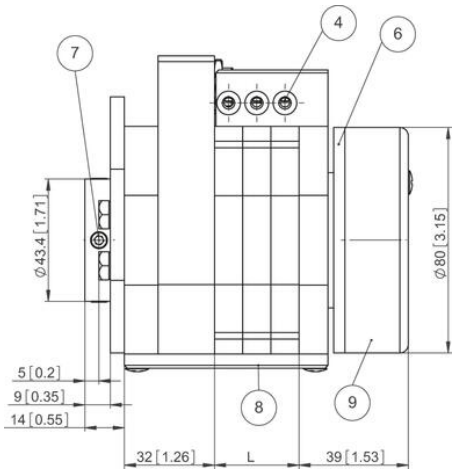
In the SRI085 series, PT100 signals are transmitted by means of a contactless inductive connection. This secures the data channels without maintenance requirements.
The design is modular and offers the greatest flexibility in a number of different applications.
SRI085's housing is built in fiberglass-reinforced polycarbonate for use in industrial use.

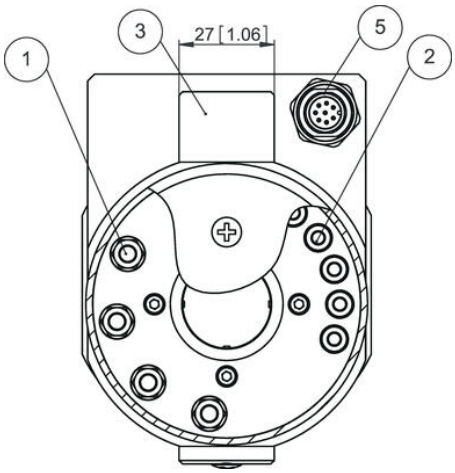
TECHNICAL DATA

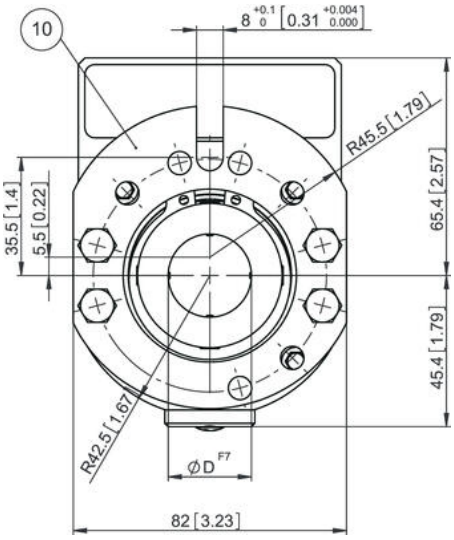
IP class	IP65, IP50
Operating voltage ac max	240 V
Temperature operational max	85 °C
Temperature operational min	-30 °C

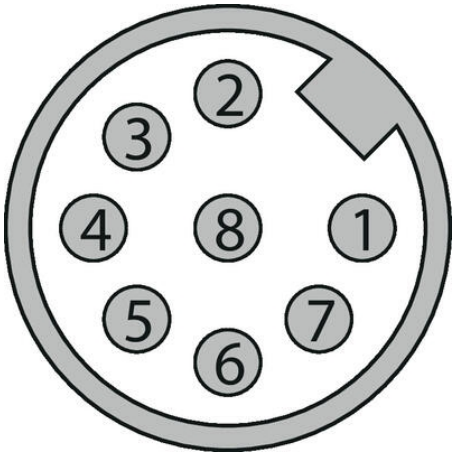



2
3
4
8
1
5
7
6


4
6
7
Ø43.4 [1.71]
Ø80 [3.15]
5 [0.2]
9 [0.35]
14 [0.55]
8
9
32 [1.26]
L
39 [1.53]


1
3
27 [1.06]
5
2


10
8 +0.1 0 [0.31 +0.004 0.000]
R45.5 [1.79]
35.5 [1.4]
5.5 [0.22]
65.4 [2.57]
45.4 [1.79]
R42.5 [1.67]
ØD F7
82 [3.23]


2
3
4
8
1
5
7
6