OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# MOLEX - MPM DIN C INDUSTRIAL / DIN C OVERMOULDED CABLE

332N2N10011
Form Micro, 2P+Earth, PVC, 1m, H6/H12, NBR Gasket, Black



- Fully overmoulded providing a high level of protection
- Quick and simple installation
- With or without LED and transient protection
- 9.4 mm or 8 mm contact distance EN175301-803 (DIN43650-C Industrial/-C)

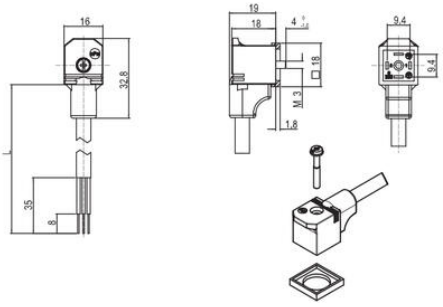
### PRODUCT DESCRIPTION

DIN Valve Connectors with moulded cable, IP65 rated. IP67 version available on request. Conforms to EN 175301-803.

# TECHNICAL DATA

## TECHNICAL DATA

| | |
|---|---|
| **Number of poles** | 2 + earth |
| **Cable length** | 1 m |
| **Material cable** | PVC |
| **Circuit** | No circuit |
| **IP class** | IP65 |
| **Rated wire cross section** | 0.5 mm² |
| **LED indicator** | No |
| **Connector** | DIN C micro 94mm |
| **Temperature operational max** | 90 °C |
| **Temperature operational min** | -40 °C |
| **Current max** | 3 A |
| **Rated voltage** | 250 V |
| **Screw size** | M3x20 |
| **Material packing** | NBR |
| **Colour LED** | No |


16
32.8
35
9
19
18
4
18
M 3
1.6
9.4
9.4