OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

MOLEX - MPM DIN C INDUSTRIAL / DIN C OVERMOULDED CABLE

392N2N10011C4K
Form Micro, 2P+Earth, H03 PVC, 1m Length, C4, 48V, Yellow



- Fully overmoulded providing a high level of protection
- Quick and simple installation
- With or without LED and transient protection
- 9.4 mm or 8 mm contact distance EN175301-803 (DIN43650-C Industrial/-C)

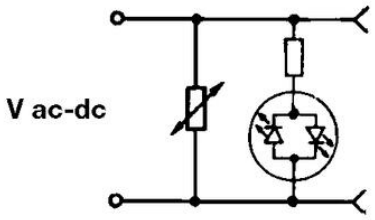
PRODUCT DESCRIPTION

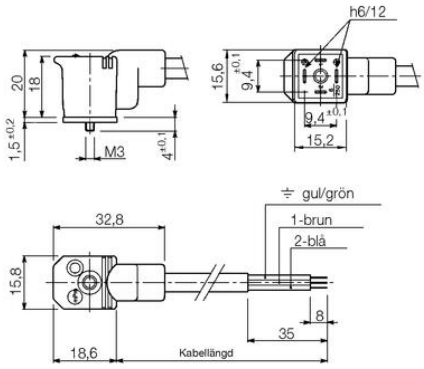
DIN Valve Connectors with moulded cable, IP65 rated. IP67 version available on request. Conforms to EN 175301-803.

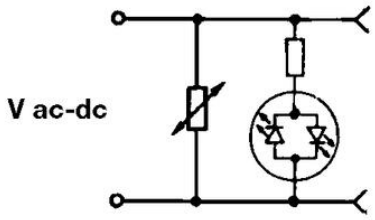
TECHNICAL DATA

TECHNICAL DATA

Number of poles	2 + earth
Cable length	1 m
Material cable	PVC
Circuit	C4: LED & varistor
IP class	IP65
Rated wire cross section	0.5 mm²
Cable diameter	5,4mm
LED indicator	Yes
Connector	DIN C micro 94mm
Temperature operational max	90 °C
Temperature operational min	-40 °C
Current max	3 A
Rated voltage	48 V AC/DC
Screw size	M3x20
Material packing	NBR
Colour LED	Yellow


V ac-dc


h6/12
20
18
1,5±0,2
M3
4±0,1
15,6
9,4±0,1
9,4±0,1
15,2
⏚ gul/grön
1-brun
2-blå
32,8
15,8
8
35
18,6
Kabellängd


V ac-dc