OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

MOLEX - MPM M8/M12-DIN A / DIN B INDUSTRIAL MOULDED CABLE CONNECTORS

E85000P12M006
DINA-M12 0,6m PUR-cable 0-250 V



- Fully overmoulded for better protection
- Quick and simple installation with M8 and M12
- With or without LED and transient protection
- EN175301-803 (DIN43650)-M8 / M12

PRODUCT DESCRIPTION

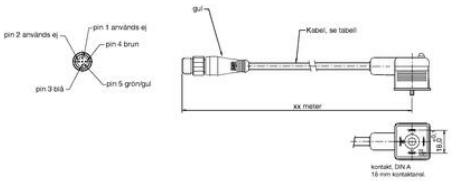
DIN Valve Connectors with moulded cable, IP65 rated. IP67 version available on request.

TECHNICAL DATA

TECHNICAL DATA

Cable length	0.6 m
Material cable	PUR/PVC
Rated wire cross section	0.5 mm²
IP class	IP65
LED indicator	No
Current max	3 A
Temperature range fixed use from	-40 °C
Temperature range flexible use to	90 °C
Temperature range flexible use from	-15 °C
Colour cable	Black

Voltage ac/dc max	250 V
Circuit	No circuit
Connection - male	M12
Connector	DINA 43650
Contact head 1	DIN


pin 2 används ej
pin 1 används ej
pin 4 brun
pin 3 blå
pin 5 grön/gul
gul
Kabel, se tabell
xx meter
16
kontakt, DIN A
16 mm kontaktansl.