

## MOLEX - MPM M8/M12-DIN A / DIN B INDUSTRIAL MOULDED CABLE CONNECTORS

E850B0P12M020

Form A - M12, C4, 24V,PUR, 24V, 2m Length, Yellow

- Fully overmoulded for better protection
- Quick and simple installation with M8 and M12
- With or without LED and transient protection
- EN175301-803 (DIN43650)-M8 / M12




### PRODUCT DESCRIPTION

DIN Valve Connectors with moulded cable, IP65 rated. IP67 version available on request.

### TECHNICAL DATA

Cable length	2 m
Circuit	C4: LED & varistor
Colour cable	Black
Colour LED	Yellow
Connection - male	M12
Connector	DINA 43650
Contact head 1	DIN
Current max	3 A
IP class	IP65
LED indicator	Yes
Material cable	PUR/PVC
Rated wire cross section	0.5 mm <sup>2</sup>
Temperature range fixed use from	-40 °C
Temperature range flexible use from	-15 °C
Temperature range flexible use to	90 °C
Voltage ac/dc max	24 V

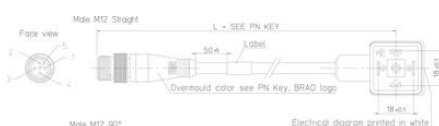

M12

DIN C4

