OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

MOLEX - MPM DUAL DIN OVERMOULDED CABLE

653N3NA3011000
Double-DINA 1m PVC-cable cc300 0-250 V

- Dual function from a single cable
- Quick and simple installation
- EN175301-803 (DIN43650)-A/ISO4400

PRODUCT DESCRIPTION

TECHNICAL DATA
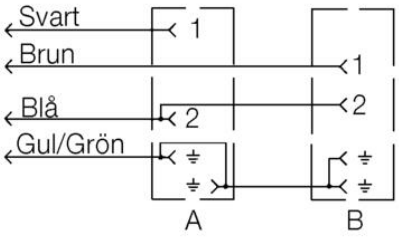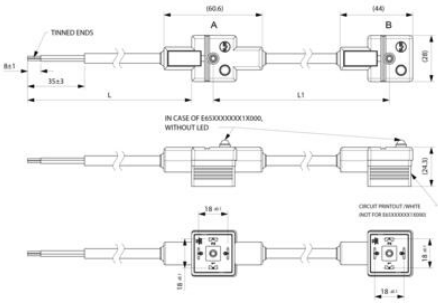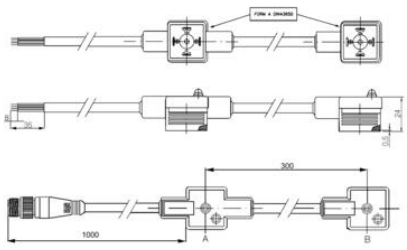
Colour cable	Black
Connector	DINA 43650
Current max	5 A
IP class	IP65
Isolation internal	PVC
Isolation outer	PVC
Rated wire cross section	0.75 mm²
Temperature range fixed use from	-20 °C
Temperature range flexible use from	-15 °C
Temperature range flexible use to	70 °C
Voltage ac/dc max	250 V