

## HONSBERG - WO1 SERIES FLOW INDICATOR

Sight Glass

WO1-040GM

- G ¼ - 15l/min - G1½ - 220l/min
- Water , Oils
- DN-8-G ¼ - DN40-G1½
- Brass / Stainless Steel
- 16 Bar max




### PRODUCT DESCRIPTION

### TECHNICAL DATA

|                           |                    |
|---------------------------|--------------------|
| Connection type           | G1 1/2 FEMALE      |
| Flow range max            | 220 l/min          |
| Flow range min            | 0 l/min            |
| Material of connection    | Brass              |
| Material of glass tube    | Borosilicate glass |
| Material of seals         | NBR                |
| Material wipers           | NBR                |
| Media                     | WATER, OILS        |
| Pressure range max        | 16 bar             |
| Temperature of media from | -20 °C             |
| Temperature of media to   | 100 °C             |
| Weight                    | 1.6 kg             |

| G       | Types     | L   | SW | X  | Weight<br>kg |
|---------|-----------|-----|----|----|--------------|
| G 1/4   | WO1-008G. | 71  | 36 | 9  | 0.3          |
| G 3/8   | WO1-010G. |     |    |    |              |
| G 1/2   | WO1-015G. | 86  | 46 | 13 | 0.6          |
| G 3/4   | WO1-020G. | 94  |    | 16 |              |
| G 1     | WO1-025G. | 104 |    |    |              |
| G 1 1/4 | WO1-032G. | 120 | 65 | 19 | 1.5          |
| G 1 1/2 | WO1-040G. | 130 |    | 20 | 1.6          |

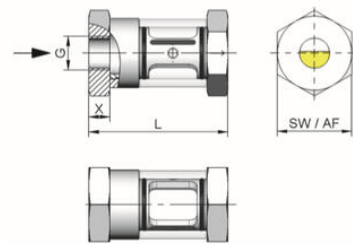

| G       | Types     | L   | SW | X  | Weight<br>kg |
|---------|-----------|-----|----|----|--------------|
| G 1/4   | WO1-008G. | 71  | 36 | 9  | 0.3          |
| G 3/8   | WO1-010G. |     |    |    |              |
| G 1/2   | WO1-015G. | 86  | 46 | 13 | 0.6          |
| G 3/4   | WO1-020G. | 94  |    | 16 |              |
| G 1     | WO1-025G. | 104 |    |    |              |
| G 1 1/4 | WO1-032G. | 120 | 65 | 19 | 1.5          |
| G 1 1/2 | WO1-040G. | 130 |    | 20 | 1.6          |

