OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

HONSBERG - RVM SERIES FLOW SWITCH

Piston

RVM-008GK060
Flow SW.0.1-0.6l/min,G1/4. St.Steel



- Swittching Range 0,04..3 l/m H_2O
- Water (gas and aggressive media available on request)
- G¼"
- Brass or Stainless Steel Wetted Parts
- Max Pressure 300 bar


PRODUCT DESCRIPTION


Mechanical flow switch, for fluid media, with magnetic triggering of a reed switch. Robust construction in brass or stainless steel.

TECHNICAL DATA


Accuracy	± 10%
Connection type	1/4 "
Contact rating max	20 VA
Electrical connection	Plug connector DIN 43650-C
Flow max	0.72 l/min
Flow range max	0.6 l/min
Flow range min	0.1 l/min
Function	Flask, reed contact, ending
Hysteresis	min 1 ml / min, depending on breaking value
IP class	IP65
Material flask	Stainless steel 316Ti
Material of body	Stainless steel 316Ti
Material of seals	Viton
Material spring	Stainless steel 316Ti
Pressure drop	0.02-0.2 bar at maximum flow


Pressure range max	300 bar
Temperature of media to	100 °C
Type of flow component	Flow Switches
Viscosity	1 cSt
Voltage ac max	200 V
Weight	0.14 kg

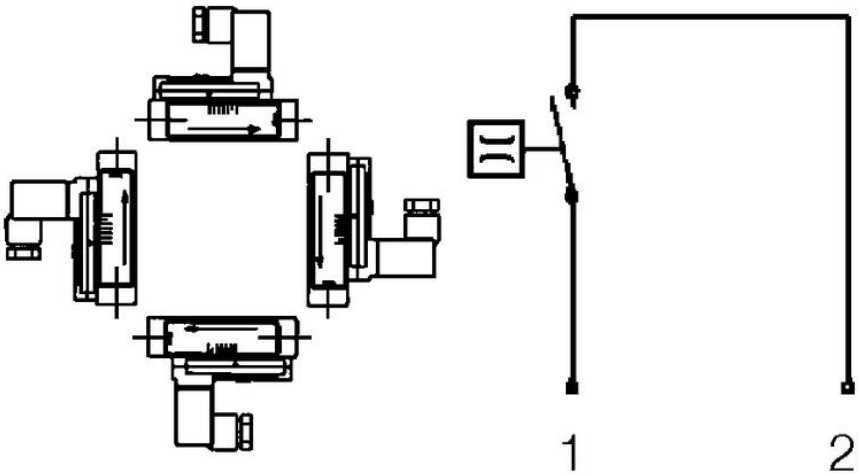

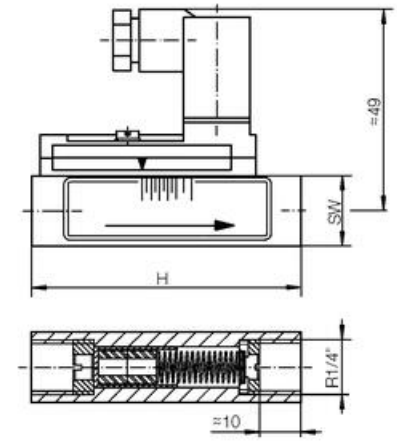

G"	Type	H mm	L mm	SW mm	Weight kg
1/4	RVM-008GM	65	49	17	0,14
1/4	RVM-008GK	65	49	18	0,15

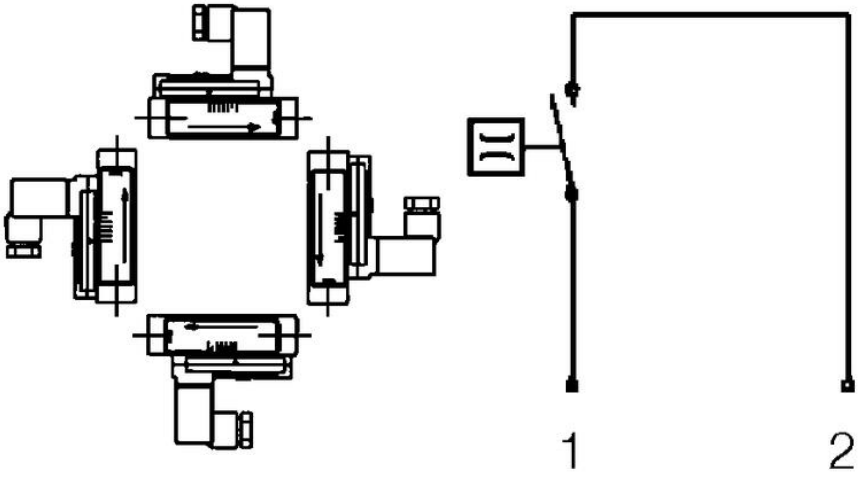

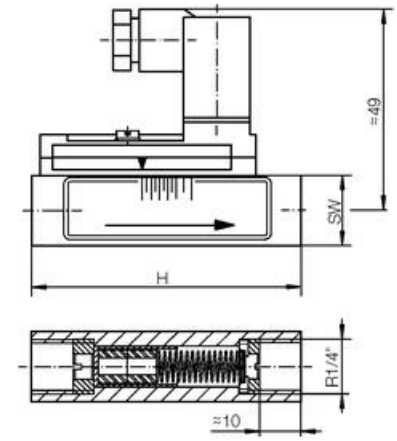

G"	Type	H mm	L mm	SW mm	Weight kg
1/4	RVM-008GM	65	49	17	0,14
1/4	RVM-008GK	65	49	18	0,15