OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

HONSBERG - FW1 SERIES FLOW SWITCH

Piston

FW1-008GM006
Flow switch. 1-6 l/min,G1/4 Brass



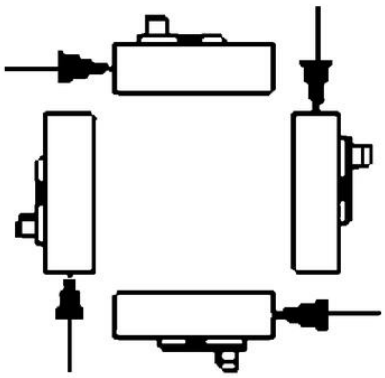
- Switching Range 1..11 l/min H²O
- Water (Oil available on request)
- G¼" up tp G1"
- Brass or POM Wetted Parts
- Max Pressure 10 bar

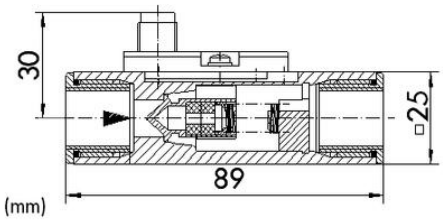
PRODUCT DESCRIPTION

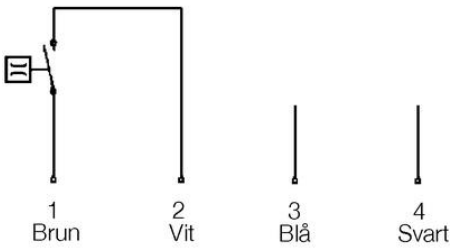
Mechanical flow switch, for fluid media, with spring-supported piston and magnetic triggering of a reed switch. Robust construction in brass and POM

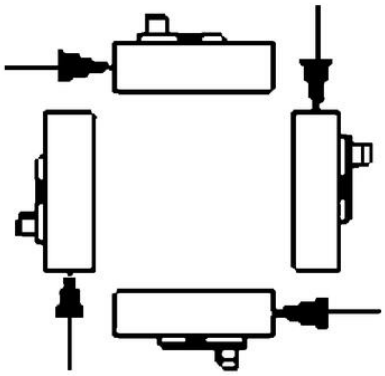
TECHNICAL DATA

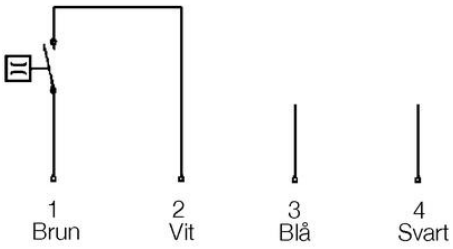
Connection type	Internal thread, G ¼ "
Contact rating max	0.5 A
Electrical connection	M12x1, 4-pole
Flow max	8 l/min
Flow range max	6 l/min
Flow range min	1 l/min
Function	Flask, reed contact, ending
IP class	IP67
Material of body	Nickel-plated brass
Material of seals	Viton
Material spring	Stainless steel 301
Pressure drop	0.2 bar at maximum flow
Pressure range max	100 bar
Temperature of media to	90 °C
Type of flow component	Flow Switches
Voltage ac max	230 V
Weight	0.35 kg




30
25
89
(mm)


1
Brun
2
Vit
3
Blå
4
Svart




1
Brun
2
Vit
3
Blå
4
Svart